

40 YEARS ELMAG®

Powered by Quality

elmag.eu 

Anniversary Highlights

July /
October
2024

Whisper compressor

WHISPER 110/8/8 W | elmag.eu/21218



- > Very quiet – 56 dB(A), light and easy to handle
- > High-quality DIY compressor
- > Oil-free 2-cylinder unit with low speed 1,400 rpm
- > Container volume 8 litres, 8 bar
- > Suction capacity 110 l/min, delivery capacity 55 l/min
- > 230 volt engine, 0.75 HP output
- > Incl. pressure switch, pressure regulator as standard with pressure gauge and 2 quick-release couplings

+ Now free of charge incl. START-SET!



3 YEARS ELMAG®
WARRANTY
AT A ONLINE-
REGISTRATION
www.elmag.eu/3years

MMA/E manual welding inverter

SD 2035M PFC/MV | elmag.eu/15015

- > Multi-voltage version: 10–200 A at 230 V or 10–110 A at 110 V
- > Welding electrode Ø: MMA 1.6–5.0 mm / LIFT-WIG 1.0–3.2 mm
- > Hot start+ (= ignition current increase) & Arc force+ (= droplet release) 0–10% adjustable, anti-stick preset, VRD & LIFT-TIG selectable
- > Thermally controlled fan, JOB function (10 memory locations)
- > PFC design for stable welding process with fluctuating mains voltage, power generator operation or long supply cables (up to 100 m / 3 × 2.5 mm²)
- > Suitable for repair / assembly operations, trade, medium-sized industry, outdoor and offshore welding, agriculture and metal construction
- > Incl. 4 m electrode holder welding cable 25 mm² / plug Ø 13 mm, 35/50 mm² 3 m earth cable 25 mm² / plug Ø 13 mm, 35/50 mm², carrying strap



MMA/E manual welding inverter

SD 2035M PFC/MV SET-K | elmag.eu/15016

+ Now also included in the SET-K!

Large transport case, 20 pcs. rutile welding electrodes each Ø 2.5 × 350 mm & 3.2 × 350 mm

SD 2035M PFC/MV SET-K

INSTEAD OF PRICE EXCL. VAT **539.-** **-22%**

419.-





BOY 330/10/20 W

**Compressors
Series BOY**

**DISCOUNT UP TO
-18%**

- > The compressor for professional construction site use
- > Oil-free special compressors with innovative technology
- > Solid rubber wheels Ø 210 mm for flexible, safe use
- > Virtually maintenance-free
- > Specially developed cylinders for extremely long-lasting operation
- > Compact design, also ideal for car transport
- > BOY 330/10/20 W with remarkable duty cycle due to extremely low engine/unit speed of ONLY 1,350 rpm, 3-cylinder unit
- > BOY 460/10/20 W: High speed (2,700 rpm) – therefore high air output, 2-cylinder unit
- > Incl. CONDOR pressure switch, ELMAG filter pressure reducer & 2 safety venting couplings as standard

Models	Effective delivery quantity	Suction capacity	Max. operating pressure	Container volume	Electric engine			Sound pressure level (4 m)	Speed compressor	Wt.	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	l/min	l/min	bar	l	Rated power	PS	V/Hz	dB(A)	rpm	kg			
BOY 330/10/20 W	200	332	10	20	2.2	3	230/50	69	1,350	37	21230	1,255.00	1,025.00
BOY 460/10/20 W	240	460	10	20	1.8	2.5	230/50	75	2,700	34	21232	1,035.00	899.00



TIGER 600/10/22 D

**Compressors
Series TIGER**

**DISCOUNT UP TO
-13%**

- > Robust technology for demanding, professional construction site use
- > Solid rubber wheels Ø 260 mm for flexible, safe use
- > High efficiency and operational reliability thanks to V-belt drive
- > Two-cylinder units with high-performance pistons Mod. 600 & 700 2-stage compacting
- > Large-area aftercooler made of die-cast aluminium
- > Sturdy tube frame with extendable handlebar
- > Incl. CONDOR pressure switch, ELMAG filter pressure reducer, engine protection switch, 2 air outlets with safety venting couplings as standard!

Models	Effective delivery quantity	Suction capacity	Max. operating pressure	Container volume	Electric engine			Sound pressure level (4 m)	Speed compressor	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	l/min	l/min	bar	l	Rated power	PS	voltage/Frequency	dB(A)	rpm	kg			
TIGER 400/10/22 W	260	380	10	2 × 11	2.2	3	230/50	74	1,300	59	10071	1,430.00	1,249.00
TIGER 400/10/22 D	260	380	10	2 × 11	2.2	3	400/50	74	1,300	59	10070	1,430.00	1,249.00
TIGER 600/10/22 D	378	539	10	2 × 11	3.0	4	400/50	78	1,400	67	10075	1,685.00	1,499.00
TIGER 700/10/22 D	439	578	10	2 × 11	4.0	5.5	400/50	78	1,400	72	10077	1,965.00	1,739.00

Compressor

EUROAIR 220/8/24 W | elmag.eu/10006

- > High-quality DIY compressor
- > 1-cylinder unit, oiled, 2,850 rpm
- > Boiler capacity 24 litres, 8 bar
- > Suction capacity 222 l/min, delivery capacity 122 l/min (at 6 bar)
- > 230-volt engine, 2 HP output
- > Complete with pressure reducer, pressure switch and EURO coupling

INSTEAD OF PRICE EXCL. VAT
~~212.-~~

DISCOUNT
-16%

179.-



Compressor

BOY 280/10/16 W | elmag.eu/10016

- > Convenient trolley design
- > 1-cylinder unit, oiled, 2,850 rpm
- > Boiler capacity 16 litres, 10 bar
- > Suction capacity 280 l/min, delivery capacity 120 l/min (at 8 bar)
- > 230-volt engine, 2 HP output
- > Complete with pressure reducer, pressure switch and EURO coupling

INSTEAD OF PRICE EXCL. VAT
~~269.-~~

DISCOUNT
-19%

219.-



Compressors

MEISTER 850/10/100 D | elmag.eu/10035

MEISTER 850/10/200 D | elmag.eu/10036

- > Workshop compressor, also for commercial applications
- > Two-stage compressing two-cylinder unit with intercooler & aftercooler made of die-cast aluminium
- > Low unit speed of 1,200 rpm for high switch-on & service life
- > Complete with filter pressure reducer, CONDOR pressure switch as well as solid rubber wheels and swivel castors with brakes
- > **NEW: Boiler coated on the inside (improved corrosion protection)**

DISCOUNT
-10%

Models	MEISTER 850/10/100 D	MEISTER 850/10/200 D
Technical data		
Effective delivery quantity	578 l/min	578 l/min
Suction capacity	827 l/min	827 l/min
Operating pressure max.	10 bar	10 bar
Container volume	100 l	200 l
Rated power	5.5 kW / 7.5 HP	5.5 kW / 7.5 HP
Mains voltage / frequency	400/50 V/Hz	400/50 V/Hz
Sound pressure level (4 m)	76 dB(A)	76 dB(A)
Speed compressor	1,200 rpm	1,200 rpm
Weight	120 kg	155 kg
Order data		
Order number	10035	10036
Instead of RRP excl. VAT	1,895.00	2,200.00
RRP excl. VAT	1,699.00	1,989.00



Compressor

PROFI-LINE 840/10/200 D | elmag.eu/11022



- > High-performance piston compressor for professional use, 2-cylinder unit, 2-stage compression
- > Boiler capacity 200 litres, 10 bar, 400 volt engine, 7.5 HP output
- > Suction capacity 850 l/min, delivery capacity 595 l/min (at 8 bar)
- > Unit speed ONLY 1,150 rpm: Long service life, low noise
- > Complete with filter pressure regulator 1/2", CONDOR pressure switch with operating hours counter, GI wheels, swivel castors with brakes & 2 safety bleed couplings

FREE NOW!

Automatic condensate drain
AKA 1/2", 230 volt



Functionality:



INSTEAD OF PRICE EXCL. VAT ~~2,847.50~~
DISCOUNT -21%
2,249.-

MARK screw compressor

MSM 5.5 D-270 | elmag.eu/11603



- > Fully automatic screw compressor for continuous operation over several hours
- > Effective delivery rate 780 l/min at 10 bar
- > Container volume 270 litres, AD2000 tested (no TÜV approval required in AT)
- > Rated power 5.5 kW, 400 volt
- > Energy-saving star-delta starting circuit
- > Intelligent digital control unit ES4000 Connect with load-idle control
- > Soundproofed "very quiet" 66 dB(A)
- > Incl. MDX refrigeration dryer for condensate-free compressed air

FREE NOW!

Functionality:



Automatic condensate drain
AKA 1/2", 230 volt and
matching rubber buffer

INSTEAD OF PRICE EXCL. VAT ~~5,862.10~~
DISCOUNT -12%
5,149.-

PROFI-LINE SILENT high-performance compressor

PLS 500/10/24+100 D | elmag.eu/10130

- > Highly effective sound insulation – noise level ONLY 67 dB(A)!!!
- > 2-cylinder unit, 2-stage compression
- > Cooling fan for forced cooling
- > Centralised condensate drainage from both DL containers
- > Suction capacity 520 l/min, delivery capacity 370 l/min (at 8 bar)
- > 400-volt engine 3 kW, 4 HP
- > Low unit speed of ONLY 1,450 rpm
- > Vibration-free due to vibration buffer
- > **Included as standard: Operating hours counter & Ball valve for compressed air outlet 1/2"**



FREE NOW!

Automatic condensate drain AKA 1/2", 230 volt



INSTEAD OF PRICE EXCL. VAT ~~2,787.58~~ **DISCOUNT -19%**
2,249.-

PROFI-LINE SILENT high-performance compressor

PLS 750/10/270 D | elmag.eu/10125

- > Highly effective sound insulation – noise level ONLY 68 dB(A)!!!
- > Complete unit incl. 270-litre compressed air container, max. 10 bar (no TÜV approval required in Austria)
- > 2-cylinder unit, 2-stage compression
- > Centralised condensate drainage from both DL containers
- > Suction capacity 750 l/min, delivery capacity 563 l/min (at 8 bar)
- > 400-volt engine 4 kW, 5.5 HP
- > Extremely low unit speed of ONLY 1,000 rpm
- > Vibration-free due to vibration buffer
- > **Included as standard: Operating hours counter, Ball valve for compressed air outlet 1/2"**
- > Optionally available: Refrigeration dryer package MDX 1200 elmag.eu/00900 (RRP: € 1,249.- excl. / € 1,498.80 incl. 20% VAT)



FREE NOW!

Automatic condensate drain AKA 1/2", 230 volt



elmag.eu/00900



INSTEAD OF PRICE EXCL. VAT ~~4,562.58~~ **DISCOUNT -17%**
3,799.-



EUROREEL AIR 8/10

INSTEAD OF PRICE ~~113.-~~ **-17%** **94.-**

INSTEAD OF PRICE ~~170.-~~ **-18%** **139.-**

Automatic hose reel

EUROREEL AIR 8/10 | elmag.eu/42292

EUROREEL AIR 10/15 | elmag.eu/42293

- > Robust, impact-resistant design
- > 10 m 8 × 12 or 15 m 10 × 15 mm hybrid polymer hose, max. 15 bar
- > 1.5 m long connection cable
- > Incl. sturdy steel wall bracket
- > **Quality connection coupling and plug nipple are fitted as standard**



EUROREEL ELECTRIC 20/230

INSTEAD OF PRICE ~~97.-~~ **-19%** **79.-**

INSTEAD OF PRICE ~~147.-~~ **-19%** **119.-**

Automatic cable reel

EUROREEL ELECTRIC 10/230 | elmag.eu/42298

EUROREEL ELECTRIC 20/230 | elmag.eu/42299

- > Load capacity unrolled: max. 2,000 W
- > 10 m or 20 m cable length, 230 volt, 3 × 1.5 mm²
- > Incl. 1.5 m supply cable
- > Incl. stable wall mounting
- > **With Schuko plug and socket outlet as standard**



Made in Italy



INDUSTRIAL hose reel

4432/32 – SET | elmag.eu/43023

- > For water (max. 130 °C), 200 bar
- > Drum/holder: ABS plastic/stainless steel AISI 304
- > Swivel joint: Stainless steel AISI 304
- > 18 m HP hose: 3/8" (9.5 × 17 mm)
- > Field of application: Workshops, agriculture
- > With swivelling bracket 40° left/right and 60 cm hose supply cable + 3 m HP connection hose & intermediate adapter to lance as standard for Kärcher/Kränzle
- > **5-year WARRANTY**

FOR HIGH PRESSURE CLEANERS

INSTEAD OF PRICE EXCL. VAT ~~773.-~~ **DISCOUNT -16%**
649.-



Automatic hose reel

EUROREEL AIR OPEN 15 S | elmag.eu/42297

- > 15 m PU ether hose 10 × 15 mm, 20 bar
 - Highly flexible (even in cold conditions)
 - 3times longer service life
 - Increased resistance to moisture and chemicals
- > Robust metal housing incl. swivelling wall or ceiling suspension
- > Incl. 3 m hose supply cable
- > **Quality connection coupling and plug nipple are fitted as standard**

INSTEAD OF PRICE EXCL. VAT ~~249.-~~ **DISCOUNT -16%**
209.-

Automatic cable reel

ROLL ELECTRIC PROFI 230/18 | elmag.eu/42171

- > Impact-resistant plastic housing
- > Load capacity unrolled: max. 2,000 W
- > TÜV & GS tested
- > 18 m cable length, 230 volt, 3 × 1.5 mm²
- > Incl. high-quality plug + coupling
- > Thermal overload protection
- > Possible option: Return brake SLOW MOTION (Art. No. 42256) enables completely independent winding of the cable.

Made in Italy

INSTEAD OF PRICE ESTABLISHED EXCL. VAT

~~257.-~~

DISCOUNT -12%

225.-



Automatic hose reel

ROLL AIR MASTER 12 | elmag.eu/42164

- > Robust, impact-resistant design
- > 12 m PU hose 8 × 12 mm, max. 15 bar
- > 2 m long connection cable
- > Swivel joint with anti-kink spring
- > Swivelling steel wall bracket
- > Incl. steel coupling & steel nipple JWL, NW 7.8
- > Possible option: Return brake SLOW MOTION (Art. No. 42257) enables completely independent winding of the cable.

Made in Italy

INSTEAD OF PRICE EXCL. VAT

~~200.-~~

DISCOUNT -12%

177.-



Automatic hose reel

ROLL AIR GENIUS 15 series


- > Closed plastic housing
- > Robust and impact-resistant
- > Swivelling housing on stable wall/ceiling suspension made of steel
- > Strong return springs made of special steel
- > High-quality PU hoses for compressed air up to 15 bar
- > Disengageable blocking device
- > Hose guide rollers for drum inlet
- > Incl. steel coupling & steel nipple JWL, NW 7.8
- > NEW: SLOW MOTION automatic reverse brake installed

Made in Italy

DISCOUNT UP TO -20%



Models	Hose quality	Hose dimension	Hose length	Supply cable	bar max.	Blocking device can be switched off	Dimensions cm				Order number	Instead of RRP excl. VAT	RRP excl. VAT
		∅ l × A mm	m	m			l	b	h	kg			
ROLL AIR GENIUS 15	PU	8×12	15	2	15	yes	45	20	36	5.1	42242	-264.00	212.00
ROLL AIR GENIUS PLUS 15	PU	10×15	15	2	15	yes	45	20	36	5.6	42245	-293.00	239.00

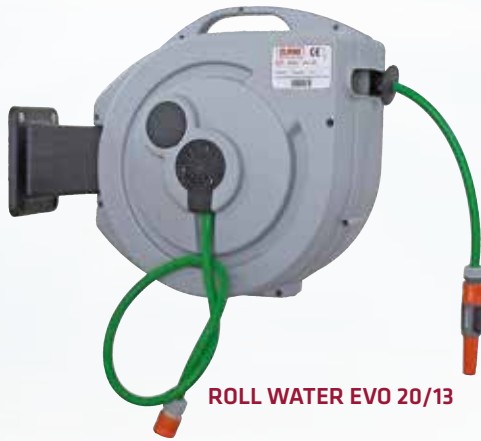

ROLL WATER EVO 20/13



ROLL WATER MEGA 20/16

**Automatic water hose reel
Series ROLL WATER**

DISCOUNT UP TO
-17%

- > **The ORIGINAL from Italy!**
- > Incl. original GARDENA starter set
- > Impact and UV-resistant plastic housing incl. sturdy wall bracket, 1 m connection cable
- > Ordered return due to layer winding mechanism
- > Strong return springs made of spring steel "Made in Germany"

Made in Italy



Models		EVO 20/13	MEGA 30/13	MEGA 20/16
Technical data				
Hose quality		PVC	PVC	PVC
Hose diameter	Inch	1/2 (11 mm)	1/2 (11 mm)	5/8 (15 mm)
Hose length	m	20	30	20
Length of supply cable approx.	m	1	1	1
Temperature max.	°C	40	40	40
Operating pressure max.	bar	6	6	6
Blocking device can be switched off		●	●	●
Weight	kg	9.8	12.7	12
Order data				
Order number		42265	42266	42267
Instead of RRP excl. VAT		225.00	312.00	312.00
RRP excl. VAT		189.00	259.00	259.00



DL impact wrench 1/2"
EPS 99 Composit | elmag.eu/44707

- > Professional impact wrench in a particularly small design for confined spaces
- > Ideal for workshop/tyre service (cars)
- > Impact-resistant composite housing
- > Air requirement 160 l/min, operating pressure 6.3 bar
- > Only 1.3 kg weight
- > One-hand operation for switching between clockwise and anti-clockwise rotation
- > Loosening/tightening torque max. 746/650 Nm
- > 4-stage power control for clockwise/anticlockwise rotation
- > Exhaust air downwards through the handle

INSTEAD OF PRICE EXCL. VAT
~~214.-~~
DISCOUNT -35%
139.-



DL impact wrench package 1/2"
EPS 103 Composit | elmag.eu/00801

- > Professional impact wrench EPS 103 in impact-resistant COMPOSIT housing
- > Only 2 kg weight
- > Loosening/tightening torque 1,352/1,085 Nm
- > Multi-stage control for R/L operation
- > High-performance double impact mechanism
- > Incl. 10-piece impact socket set, hose set "high-flex" 10 m, 10 x 15.5 mm and oil bottle

INSTEAD OF PRICE EXCL. VAT
~~393.50~~
DISCOUNT -39%
239.-

CA rod grinder set

EPS 420 K | elmag.eu/43805

- > Starter set complete in PVC case with 10 corundum pins
- > High speed – 25,000 rpm
- > Air requirement 113 l/min, operating pressure 6.3 bar
- > Safety switch to prevent unintentional switch-on
- > Automatic stop
- > Small and handy (only 360 g)
- > Exhaust air through the handle to the rear
- > Incl. collet 3+6 mm

INSTEAD OF PRICE EXCL. VAT
~~93.-~~

DISCOUNT
-26%

69.-



CA needle deruster

EPS 240 | elmag.eu/43825

- > For derusting, cleaning and knocking off residues
- > Universally applicable in steel construction, the construction industry, for maintenance and in agriculture
- > Pistol shape with cold-insulated handle
- > Air requirement 283 l/min, operating pressure 6.3 bar
- > Stroke rate: 3.700 1/min
- > 19 needles Ø 3 × 180 mm
- > Optional: 29 pcs. needles Ø 2 × 180 mm
- > Safety switch with automatic stop

INSTEAD OF PRICE EXCL. VAT
~~297.-~~

DISCOUNT
-20%

239.-



CA demolition hammer SET

EPS 220 | elmag.eu/43820

- > Small, handy demolition hammer for wall breakthroughs & demolition work in brick & lightweight concrete
- > Robust steel chisel holder
- > Impact force/performance: 10 joules
- > Air requirement approx. 400 l/min at max. 6.2 bar
- > Flat & pointed chisel 250 mm, made of chrome-molybdenum steel
- > Anti-vibration hose at the air inlet
- > Weight 2.6 kg

INSTEAD OF PRICE EXCL. VAT
~~355.-~~

DISCOUNT
-21%

279.-



CA angle impact wrench 1/2"

EPS 95 Composit | elmag.eu/44706

- > Right-angle impact wrench with 70 mm head height incl. square drive
- > Impact-resistant composite housing
- > Loosening/tightening torque 244/300 Nm
- > Rotary switch for clockwise/anticlockwise rotation with 2 power levels (clockwise rotation)
- > Jumbo impact mechanism
- > Weight 1.8 kg

INSTEAD OF PRICE EXCL. VAT
~~350.-~~

DISCOUNT
-20%

279.-





Made in Denmark

INSTEAD OF PRICE ~~141.-~~ **129.-**
RRP INCL. 20% VAT 154.80

INSTEAD OF PRICE ~~165.-~~ **-10% 149.-**
RRP INCL. 20% VAT 178.80



Incl. QT quick connector

CALIBRATED!

Digital hand tyre fillers

Model JWL incl. QT quick connector | elmag.eu/41500

Model JWL incl. twin plug | elmag.eu/41501

- > Pressure deviation max. 0.01 to 0.04 bar
- > Pressure range: 0.2-10 bar
- > Incl. 1 m hose, with patented QT quick or twin connector
- > QT quick connector: 100% tightness to the valve (Schrader valve)
- > Display accuracy according to DS/EN 12645:2014
- > Each device with a serial number and its own calibration certificate
- > Shock-resistant due to rubber coating
- > Dust and water protection – IP 65
- > Working temperature: -10 to +40 °C
- > Large display with backlight
- > Display options: bar / psi / kPa / kg/cm²



Incl. twin plug

25
YEARS
WARRANTY

JWL compressed air guns

JWL's products are developed, produced and tested in their own factory in Denmark. JWL blow guns have become a classic – the combination of classic design and maximum functionality makes your work easier and more practical.

DISCOUNT UP TO
-30%




Made in Denmark

Blow guns

The durability of our blow guns is outstanding – even after 28 million activations. We are therefore proud to be able to offer a 25-year warranty on the valve system of our JWL blow gun.

- > Medium: Filtered compressed air
- > Max. operating pressure: 16 bar
- > Recommended working pressure: 2-8 bar
- > Air consumption at 6/8 bar: 290/380 l/min
- > Large selection of models (pipe lengths up to 2 metres possible)

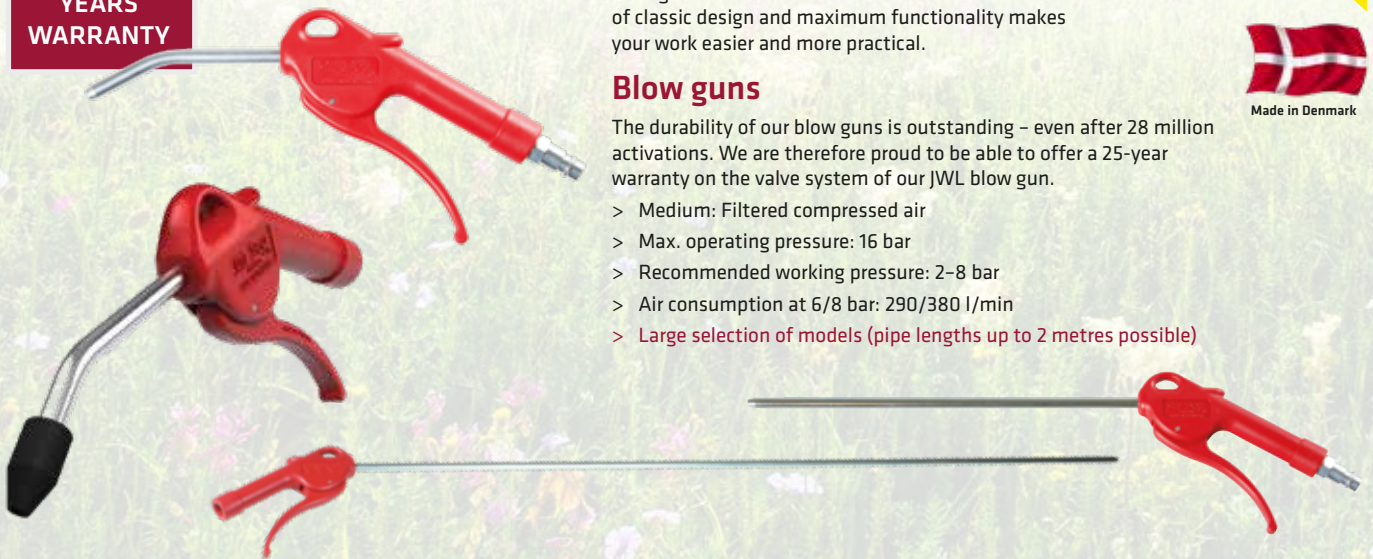

Models	Order number	Instead of RRP excl. VAT	RRP excl. VAT
Classic, pipe Ø 8 × 100 mm, bent, incl. plug-in nipple	41302	-19.00	13.50
Classic, pipe Ø 8 × 100 mm, curved, with rubber nozzle, incl. plug-in nipple, protects against scratches and scrapes	41305	-25.00	17.50
Classic, pipe-Ø 8 × 300 mm, straight, incl. plug-in nipple	41310	-27.50	19.50
Classic, pipe-Ø 8 × 500 mm, straight, incl. plug-in nipple	41312	-30.00	22.00

MIG/MAG gas-shielded arc welding systems

EUROMIG^{plus}

- > Compact design with clear, ergonomically arranged control panel
- > Powerful feed units with 2 roller drive, with 3 m hose package length as standard
- > From model EM 204: Main transformers with copper winding, 2-cycle, 4-cycle, spot & interval welding function, EM 174 only 2-cycle & spot welding function

SALE
(VALID WHILE STOCKS LAST)

Models		EM 174	EM 204	EM 254
Material thickness	mm	0.5-6	0.5-8	0.5-10
Welding current setting range	A	35-120	90-165	15-200
Welding current switching stages	No.	6	10	10
Steel/stainless steel wire diameter	mm	0.6-0.8	0.6-1.0	0.6-1.2
Duty cycle at 40 °C	%/A	100/47	100/47	100/100
Duty cycle at max. welding current	%/A	10/120	10/165	20/200
Feed drive	Rollers	2	2	2
Original BINZEL hose package	MB	EVO 15 / 3 m	EVO 15 / 3 m	EVO 25 / 3 m
Mains voltage/fuse protection	V/A	230/16	400/16	400/16
Order number		54015	54016	54017
Instead of RRP excl. VAT		1,188.50	1,653.50	2,006.50
RRP excl. VAT		929.00	1,299.00	1,469.00

DISCOUNT UP TO
-27%



EUROMIG^{plus} 254

+ FOR FREE! Wear parts set and a pair of welding gloves

MIG/MAG gas-shielded arc welding systems

PROFI-MIG 3000^{plus}

- > Powerful PROFI models from 265-300 amps with fine power subdivision as up to 20 (2 x 10) switching steps (depending on model), with 4 m hose package length as standard
- > Powerful feed units with 4-roller drive & thermally controlled fans
- > Main transformers with copper winding, 2-cycle, 4-cycle, spot & interval welding function

SALE
(VALID WHILE STOCKS LAST)

Models		PM 274	PM 304
Material thickness	mm	0.5-10	0.5-12
Welding current setting range	A	30-265	30-300
Welding current switching stages	No.	10	2 x 10
Steel/stainless steel wire diameter	mm	0.6-1.2	0.6-1.2
Duty cycle at 40 °C	%/A	100/130	100/165
Duty cycle at max. welding current	%/A	20/265	30/300
Feed drive	Rollers	4	4
Original BINZEL hose package	MB	EVO 25 / 4 m	EVO 25 / 4 m
Mains voltage/fuse protection	V/A	400/16	400/16
Order number		54007	54008
Instead of RRP excl. VAT		2,290.00	2,580.00
RRP excl. VAT		1,729.00	1,999.00

DISCOUNT UP TO
-25%



PROFI-MIG 3000^{plus} 304

+ FOR FREE! Wear parts set and a pair of welding gloves

MIG/MAG, MMA multifunction welding inverter

CPTX-I 400 2W | elmag.eu/54080

- > Infinitely variable MIG/MAG, MMA/E manual industrial welding unit with 100% duty cycle at 400 amps
- > SYNERGY function for automatic wire feed control when welding current is increased/decreased with different characteristic curves for STEEL & STAINLESS STEEL
- > With detachable feed unit & water-cooled hose package, as well as many features



Model		CPTX-I 400 2W
Material thickness	mm	1.0-30
Welding current setting range MIG/MAG	A	30-400
Welding voltage setting range	V	12-38
Steel/stainless steel wire diameter	mm	0.8-1.2
Aluminium wire diameter	mm	1.0-1.2
Duty cycle at max. welding current MIG/MAG	%/A	100/400
Welding current setting range MMA	A	30-300
Duty cycle at max. welding current MMA	%/A	60/300
Welding wire reel diameter	mm	200/300
Welding wire reel weight	kg	5/15
Feed drive	Rollers	4
Water-cooled	-	●
Mains voltage/fuse protection	V/A	400/32
Weight	kg	120

INSTEAD OF PRICE EXCL. VAT
5,830.-

4,899.-

+ FOR FREE! Hose package MBC 501 W/4 m



STEEL SET mixed gas 20 litres SG2/G₃Si
1-0,8 mm / 15 kg | elmag.eu/00285 **359.-**

STEEL SET mixed gas 20 litres SG2/G₃Si
1-1,0 mm / 15 kg | elmag.eu/00286 **359.-**

STEEL SET mixed gas 20 litres SG2/G₃Si
1-1,2 mm / 15 kg | elmag.eu/00287 **359.-**



Automatic welding screen
MultiSafeVario® L-TC | elmag.eu/56381

- > For all common welding processes, also for TIG > 5 A
- > **TRUE COLOUR** for true colour perception during welding
- > **Protection level 9-13 stepless, external controls**
- > Adjustable brightening delay: 0.3 ~ 0.9 s
- > 4 light sensors, weight: 520 g
- > Top marks for classification: 1/1/1/1, shutter speed: 0.05 ms
- > Viewing window: 98 x 43 mm
- > Sanding mode, replaceable backup battery
- > **Improved headband, ergonomic helmet shell,**
Optionally available: Dioptr disc insert
- > **Incl. attachment discs: 3 pcs. outside, 1 pcs. inside**

INSTEAD OF PRICE EXCL. VAT
~~66.50~~

DISCOUNT
-38%

41.50



Automatic welding screens
MultiSafeVario® 2XL

- > For all common welding processes, also for TIG > 5 A
- > **Protection level 9-13 stepless, external controls**
- > Adjustable brightening delay: 0.3 ~ 0.9 s
- > 4 light sensors, weight: 470 g
- > Classification: 1/1/1/2, shutter speed: 0.05 ms
- > Large viewing windows: 98 x 55 mm
- > Sanding mode, replaceable backup battery, battery status indicator
- > **Improved headband, ergonomic helmet shell,**
Optionally available: Dioptr disc insert
- > **Incl. attachment discs: 3 pcs. outside, 1 pcs. inside**

INSTEAD OF PRICE EXCL. VAT
~~109.-~~

DISCOUNT
-33%

72.90

2XL art | elmag.eu/56382

2XL eagle | elmag.eu/56383

2XL flame | elmag.eu/56384



Automatic welding screen
MultiSafeVario® PREMIUM-TC | elmag.eu/58380

- > For all common welding processes, also for TIG > 3 A
- > **TRUE COLOUR** for true colour perception during welding
- > **Protection level 4-9 & 8-13 stepless, internal controls**
- > Adjustable brightening delay 0.3 ~ 0.9 s
- > 4 light sensors, weight: 460 g
- > Top marks for classification 1/1/1/1, shutter speed: 0.033 ms
- > Extra large viewing window: 100 x 65 mm
- > Sanding mode, replaceable backup battery, battery status indicator
- > **Improved headband, ergonomic helmet shell,**
Optionally available: Dioptr disc insert
- > **Incl. attachment discs: 3 pcs. outside, 1 pcs. inside**

INSTEAD OF PRICE EXCL. VAT
~~129.-~~

DISCOUNT
-23%

99.90



Automatic welding screen
Optrel® neo P550 | elmag.eu/57200

- > For all common welding processes, > 28 A
- > **TRUE COLOUR** for true colour perception during welding
- > **Protection level 9-13 stepless, external and internal controls**
- > Adjustable brightening delay: 0.05 ~ 1.0 s
- > 3 light sensors, weight: 495 g
- > Classification: 1/1/1/2, shutter speed: 0.1 ms
- > Large viewing window: 100 x 50 mm
- > Sleep mode, replaceable backup battery, battery status indicator
- > **Optionally available: Dioptr disc insert, industrial helmet adapter,**
industrial helmet, leather head, neck and chest protection

INSTEAD OF PRICE EXCL. VAT
~~267.-~~


DISCOUNT
-16%

225.-

Tungsten electrode grinder

WSG 4 | elmag.eu/56470

- > Precise sanding of tungsten electrodes ensures the best welding results
- > Practical hand tool in a case for mobile use on the construction site or in the workshop
- > For sanding or cutting electrodes to length
- > Grindable electrode Ø: 1.0/1.6/2.0/2.4/3.2/4.0 mm
- > Various sanding angles: 15/18/22.5/30°
- > Grindable electrode length min: 30 mm
- > Sanding disc Ø: 33.5 mm (can be used on both sides)
- > Speed: (adjustable) max. 11,000 rpm
- > Engine power: 750 W / Mains connection 230 V / Weight: 1.6 kg



DISCOUNT
-16%
INSTEAD OF PRICE EXCL. VAT
~~439.-~~
369.-

Tungsten electrode grinder

WSG 5 | elmag.eu/56475

- > Practical tabletop device with integrated stop for setting the optimum grinding length
- > Clamping and grinding using electrode clamps is also easy to carry out with leather gloves, electrodes with spherical caps or alloyed metal drops can also be ground
- > The sanding process takes place in the longitudinal direction of the electrode and thus improves the ignition properties, ensures a more stable arc and longer service life
- > Grindable electrode Ø: 1.6/2.0/2.4/3.2/4.0/5.0 mm
- > Infinitely adjustable sanding angle: 10-60°
- > Grindable electrode length min: 35 mm
- > Sanding disc Ø: 90 mm
- > Speed: 6,500 rpm
- > Engine power: 60 W / Mains connection: 230 V / Weight: 4.0 kg

DISCOUNT
-15%
INSTEAD OF PRICE EXCL. VAT
~~469.-~~
399.-



Stainless steel cleaning device

Series ERG

- > Professional devices with AC transformer & overload protection for occasional to regular use
- > For electrochemical cleaning of TIG welding welds
- > Annealing colours and oxides from welding welds can be removed in an environmentally friendly manner without the use of toxic pickling agents
- > Cleaning with carbon fibre brush as well as signing and marking (optional) with graphite anode & felt
- > ERG 500: 500 watt, 4.0 kg / ERG 1000: 800 watt, 14 kg

Extensive standard equipment:

ERG 500 or ERG 1000, earth cable Ø 16 mm²/3 m, handle cable Ø 10 mm²/4 m, handle+carbon fix "Performance", carbon fibre brush IG M10 size XL, electrolyte special 1 litre, neutralite 1 litre, ceramic paste, disassembly/assembly tool, 2 hand spray bottles 1 litre, wide-mouth electrolyte container, latex gloves, safety goggles, plastic case



ERG 500 set
elmag.eu/58495

DISCOUNT
-17%
INSTEAD OF PRICE EXCL. VAT
~~799.-~~
665.-

ERG 1000 set
elmag.eu/58496

DISCOUNT
-15%
INSTEAD OF PRICE EXCL. VAT
~~999.-~~
849.-



Stainless steel cleaning device

ERG 1600-SET | elmag.eu/58497

- > Professional device for continuous use with infinitely variable inverter-based power control for cleaning, polishing and high-gloss polishing of TIG welding welds as well as with AC transformer and separate connection socket for marking
- > Annealing colours and oxides from welding welds can be removed in an environmentally friendly manner without the use of toxic pickling agents
- > Cleaning with carbon fibre brush, polishing / high-gloss polishing with carbon fibre brush or graphite anode & felt (optional) as well as signing and marking (optional) with graphite anode & felt
- > ERG 1600: 1200 watt, 7 kg

Extensive standard equipment:

ERG 1600, earth cable Ø 16 mm²/3 m, handle cable Ø 10 mm²/4 m, handle+ carbon fix "Performance", carbon fibre brush IG M10 size XL, electrolyte special 1 litre, neutralite 2 litre, ceramic paste, disassembly/assembly tool, 1 hand spray bottles 1 litre, wide-mouth electrolyte container, latex gloves, safety goggles, plastic case



DISCOUNT
-15%
INSTEAD OF PRICE EXCL. VAT
~~1,439.-~~
1,219.-



MIG/MAG, MMA/E manual, TIG welding inverter Series M3S

DISCOUNT UP TO
-15%

- > Mobile multifunctional welding inverter
- > 3 welding processes in one device, MIG/MAG, MMA/E manual & LIFT-TIG (DC)
- > Synergic operation in MIG/MAG process for steel, stainless steel, aluminium and CuSi materials or manual operation
- > 200/250 or 300/350 amps max. welding current at 60 or 40% duty cycle
- > Three-phase 3~400 V, compliant with Ecodesign directive as energy efficiency > 80%
- > 4-roller drive incl. gear rim connection to pressure rollers made of die-cast aluminium
- > XL housing size for welding wire reels Ø & weight: max. Ø 300 mm / max. 15 kg
- > Incl. 2-cycle, 4-cycle, special 4-cycle & spot-welding function
- > In MIG/MAG mode: Inductance, under FN gas pre-flow (PrG) & gas post-flow time (PoG), soft start (Sft), urnBack/wire burn-back (bub), up/down remote control (u-d), in special 4-stroke mode also start-current (SCP) and end crater current (ECP) as well as in MMA mode: Hot start (Hot) & arc force (Arcf) adjustable
- > JOB function: 10 welding programmes can be stored
- > Gas-shielded cored wire welding also possible with optional accessories and polarity reversal

Extensive standard equipment:

Hose package MBC 24/4 m or 36/4 m, earth cable 3 m, electrode holder welding cable 4 m, gas hose incl. Quick Fit quick connector DN5 / 2.5 m, pressure regulator with 2 pressure gauges incl. Quick Fit coupling DN5, various feed rollers for steel/stainless steel/CuSi₃ & aluminium welding

Optionally available:

STEEL SET mixed gas (welding wire C₂Si 1 0.8; 1.0 or 1.2 mm / 15 kg & 20 litres of mixed gas)

elmag.eu/00285; elmag.eu/00286; elmag.eu/00287 (RRP: € 359,- excl.)

WIG tube set SRC 26/4 m - Up/Down (elmag.eu/15850) Steel cylinder Argon 20 litres (elmag.eu/54242)



M3S 2060 T 4XL

+ FOR FREE! Wear parts set and a pair of welding gloves



M3S 2560 T 4XL



M3S 3040 T 4XL



M3S 3540 T 4XL

Models		M3S 2060 T 4XL	M3S 2560 T 4XL	M3S 3040 T 4XL	M3S 3540 T 4XL
Technical data					
Material thickness	mm	0.6-8	0.6-10	0.6-12	1.0-14
Welding current setting range (MIG/MAG)	A	25-200	30-250	30-300	50-350
Welding current setting range (MMA & TIG)	A	10-200	10-250	10-300	10-350
Steel wire diameter	mm	0.6-1.0	0.6-1.2	0.6-1.2	0.8-1.6
Stainless steel wire diameter	mm	0.8-1.0	0.8-1.2	0.8-1.2	1.0-1.6
Aluminium wire diameter	mm	1.0-1.2	1.0-1.2	1.0-1.2	1.0-1.6
Duty cycle at 40 °C	%/A	100/155	100/193	100/199	100/221
Duty cycle at max. welding current	%/A	60/200	60/250	40/300	40/350
Feed drive	Rollers	4	4	4	4
Original ELMAG hose package	MB	EVO 24 / 4 m	EVO 24 / 4 m	EVO 36 / 4 m	EVO 36 / 4 m
Efficiency	>	80%	80%	80%	80%
Power consumption in idle mode	W	25	25	25	25
Mains voltage/fuse protection	V/A	400/16	400/16	400/16	400/32
Order data					
Order number		15225	15228	15231	15234
Instead of RRP excl. VAT		1,378.50	1,558.50	1,838.50	2,348.50
RRP excl. VAT		1,189.00	1,349.00	1,579.00	1,999.00

MIG/MAG, MMA/E manual, TIG welding inverter

P3S 1825M 2L/MV | elmag.eu/15204

- > 3 welding processes in one device, synergic operation in MAG process
- > Max. 180 amps at 25% duty cycle, infinitely variable 20-180 A
- > Mono-phase 1-230 V, compliant with Ecodesign directive as energy efficiency > 85%
- > 2-roller drive incl. gear rim connection to the pressure roller made of die-cast aluminium
- > Incl. 2-cycle, 4-cycle & spot welding function, in MIG/MAG mode: Inductance, BBT (BurnBackTime) wire burnback and in MMA mode: Hot start & arc force adjustable
- > Gas-shielded cored wire welding also possible with optional accessories and polarity reversal
- > Material thickness: MAG 0.8-5 mm / MMA welding electrodes: Ø 1.6-4.0 mm

Extensive standard equipment:

Hose package MB EVO 15 / 3 m, earth cable 25 mm²/3 m, electrode holder welding cable 25 mm²/4 m, gas hose incl. quick fit quick connector DN5 / 2.5 m, pressure regulator with 2 pressure gauges incl. quick fit coupling DN5, feed rollers for 0.6/0.8/0.9/1.0 mm wire

Optionally available:

STEEL SET mixed gas (welding wire C₂Si 1 0.8 mm/5 kg & 20 litres of mixed gas)

elmag.eu/00281 (RRP: € 329.- excl. VAT)

TIG hose package SRC 26 V/4 m elmag.eu/15810 (RRP: € 156.- excl. VAT)

Steel cylinder Argon 20 litres elmag.eu/54242 (RRP: € 425.- excl. VAT)



FOR FREE! Wear parts set

INSTEAD OF PRICE EXCL. VAT ~~732.-~~

DISCOUNT -32%

499.-

STEEL SET mixed gas

MMA/E manual welding inverter

SD 2560T | elmag.eu/15020

INSTEAD OF PRICE ~~659.-~~ **619.-**

SD 4060T CEL | elmag.eu/15030

INSTEAD OF PRICE ~~1,269.-~~ **1,199.-**

- > SD 2560T: 10-250 A, SD 4060T CEL: 20-400 A
- > Welding electrode Ø: SD 2560T: MMA 1.6-5.0 mm / LIFT-WIG 1.0-3.2 mm
SD 4060T CEL: MMA 1.6-6.0 mm / LIFT-WIG 1.0-4.0 mm
- > Functions such as hot start+ (= ignition current increase) & Arc force+ (= droplet release) 0-10% adjustable, anti-stick preset, VRD & LIFT-TIG selectable
- > Thermally controlled fan
- > GEN POWER: Can be operated using a voltage-regulated power generator, can be used with up to 100 m extension cable (5 x 2.5 mm²)
- > Suitable for repair/assembly operations, trade, medium-sized industry, outdoor and offshore welding, agriculture, metal construction and pipeline construction

Extensive standard equipment Model SD 2560T:

4m electrode holder welding cable 35 mm² / plug Ø 13 mm, 35/50 mm²
3m earth cable 35 mm² / plug Ø 13 mm, 35/50 mm²

Model SD 4060T CEL:

4m electrode holder welding cable 50 mm² / plug Ø 13 mm, 35/50 mm²
3m earth cable 50 mm² / plug Ø 13 mm, 35/50 mm²



SD 4060T CEL



Argon pressure regulator

Optional accessories for MMA/E manual welding inverters	Order number	RRP excl. VAT
SD 1635M PFC/MV – SD 4060T CEL for LIFT-TIG welding		
TIG hose package SRC 26 V / 4 m, incl. 19-piece original equipment set	15810	156.00
TIG hose package SRC 26 V / 8 m, incl. 19-piece original equipment set	15811	209.00
Gas hose 2.5 m for argon/Co2, quick coupling	15135	19.90
Argon pressure regulator, 0-12 litres/min., incl. coupling	54106	77.00
Steel cylinder Argon 4.6, 20 litres / 200 bar filled	54242	425.00



TIG hose package



Gas hose 2.5 m

Argon steel cylinder



+ Now included in the ECO-SET-G!

TIG DC, MMA/E manual welding inverter

DD 2050M P/PFC/MV ECO-SET-G | elmag.eu/15041

- > Multi-voltage version: 5-200 A at 230 V or 5-130 A at 110 V
- > Welding electrode Ø: TIG 1.0-3.2 mm / MMA 1.6-5.0 mm
- > DC constant or pulsed welding current (0.5-200 Hz), hot start+, arc force+
- > 2-cycle/4-cycle or spot welding, JOB memory
- > PFC design for stable welding process with fluctuating mains voltage, power generator operation or long supply cables (up to 100 m / 3 × 2.5 mm²)
- > Ideal for steel, stainless steel/chrome steel, titanium or copper e.g. for exhaust systems, tanks, body panels,...
- > TIG hose package SRC 26 / 4 m – HF incl. UP/DOWN Current control on the handle, 4 m electrode holder-cable, 3 m earth cable, pressure regulator & 2.5 m gas-hose with quick-release couplings, etc.



INSTEAD OF PRICE EXCL. VAT ~~1,045.-~~
DISCOUNT -14%
899.-



+ Now included in the ECO-SET-G!

TIG DC, MMA/E manual welding inverter

DD 2560T P ECO-SET-G | elmag.eu/15046

- > 5-250 A at 400 V
- > Welding electrode Ø: TIG 1.0-3.2 mm / MMA 1.6-5.0 mm
- > DC constant or pulsed welding current (0.5-200 Hz), hot start+, arc force+
- > 2-cycle/4-cycle or spot welding, JOB memory
- > GEN POWER: Can be operated using a voltage-regulated power generator, can be used with up to 100m extension cable (5 × 2.5 mm²)
- > Ideal for steel, stainless steel/chrome steel, titanium or copper e.g. for exhaust systems, tanks, body panels,...
- > TIG hose package SRC 26 / 4 m – HF incl. UP/DOWN Current control on the handle, 4 m electrode holder-cable, 3 m earth cable, pressure regulator & 2.5 m gas-hose with quick-release couplings, etc.



INSTEAD OF PRICE EXCL. VAT ~~1,175.-~~
DISCOUNT -10%
1,059.-



+ Now included in the ECO-SET-G!

TIG AC/DC, MMA/E manual welding inverter

AD 2060M P/PFC/MV ECO-SET-G | elmag.eu/15061

AD 2060M P/PFC/MV ECO-SET-W | elmag.eu/15062

- > Multi-voltage version: 5-200 A at 230 V or 5-160 A at 110 V
- > Welding electrode Ø: TIG 1.0-4.0 mm / MMA 1.6-5.0 mm
- > AC/DC constant or pulsed welding current (0.3-999 Hz), AC square wave or AC sine wave, AC balance (± 5), AC frequency-regulation (50-250 Hz), Hot Start+, Arc Force+
- > 2-cycle/4-cycle or spot welding, JOB memory
- > PFC design for stable welding process with fluctuating mains voltage, e.g. power generator operation or long supply cables (up to 100 m / 3 × 2.5 mm²)
- > Ideal for aluminium, steel, stainless steel/chrome steel, titanium or copper e.g. for exhaust systems, tanks, body panels, aluminium castings,...
- > Available as ECO-SET-G (gas-cooled) or ECO-SET-W (water-cooled)



Now included:

- > TIG hose package SRC 26 / 4 m (ECO-SET-G) or SRC 18 / 4 m (ECO-SET-W) – HF incl. UP/DOWN current control on the handle
- > 4m electrode holder welding cable 25 mm² / plug Ø 13 mm, 35/50 mm²
- > 3 m earth cable 25 mm² / plug Ø 13 mm, 35/50 mm²
- > 2.5 m gas hose for argon incl. quick fit quick connector DN5
- > Pressure regulator for argon, 0-12 litres/min. incl. quick fit coupling DN5
- > 19-piece TIG initial equipment set
- > 1 pair of TIG welding gloves size 9.5/XL
- > ECO-SET-W additionally incl: Water cooling unit, transport trolley & cooling liquid



AD 2060M P/PFC/MV ECO-SET-G
elmag.eu/15061

INSTEAD OF PRICE EXCL. VAT ~~1,735.-~~
DISCOUNT -15%
1,479.-

AD 2060M P/PFC/MV ECO-SET-W
elmag.eu/15062

INSTEAD OF PRICE EXCL. VAT ~~2,745.-~~
DISCOUNT -14%
2,349.-



+ Now included in the ECO-SET-W!

Plasma cutting inverter CEBORA

POWER PLASMA 3035/M | elmag.eu/55811

PLASMA SOUND PC 70/T | elmag.eu/55813

PLASMA SOUND PC 110/T | elmag.eu/55814

INSTEAD OF PRICE ~~2,360.-~~ **-10% 2,125.-**
RRP INCL. 20% VAT 2,560.-

INSTEAD OF PRICE ~~3,877.-~~ **-10% 3,489.-**
RRP INCL. 20% VAT 4,186.80

INSTEAD OF PRICE ~~4,719.-~~ **-10% 4,249.-**
RRP INCL. 20% VAT 5,098.80

FOR FREE!

Accessories and wearing parts set



POWER PLASMA 3035/M

Models	Mains connection	Network protection	Current setting range	ED at max. power	Cutting performance/speed Steel in mm (m/min.)		Burner package (as standard)	Air consumption	Weight
	volt	AT	Amps	at 40 °C	Quality cut	Separating cut	Type	lt/min/bar	kg
POWER PLASMA 3035/M	230	16	5-30	35%	8 (0.5)	15 (0.12)	CP 40 4 m long	60/3.5	13
PLASMA SOUND PC 70/T	208-440	16	20-70	60%	25 (0.2)	35 (0.08)	CP 70C 6 m long	230/5.5	26
PLASMA SOUND PC 110/T	208-440	32	20-110	50%	35 (0.26)	50 (0.05)	CP 162C 6 m length	250/5.5	34

Extraction systems, mobile

Series SMART MASTER

- > Compact basic device for sporadic smoke extraction, 230 volt
- > Rotating & swivelling extraction bonnet 360°
- > Three-stage filter (filter area 13 m²)
- > Extraction capacity with arm 950 m³/h
- > Noise level: 72 db(A)

Arm length 2 m
W3/IFA tested
elmag.eu/58600

Arm length 2 m
H13 AT Edition
elmag.eu/58650

INSTEAD OF PRICE EXCL. VAT
~~1,790.-~~

1,699.-

INSTEAD OF PRICE EXCL. VAT
~~1,875.-~~

1,779.-

Product video:



FREE NOW!

10 pre-filter mats



NOTE: ELMAG® offers the SMART-MASTER mobile suction units in two versions!

Selection criteria	Austria	Germany
Sufficient authorisation for standard welding fumes (without carcinogenic substances)	W3/IFA approval	W3/IFA approval
Required authorisation for carcinogenic substances (e.g. welding fumes for stainless steel or brass welding work)	H13 AT Edition (HEPA filter according to GKV 2011, § 15)	W3/IFA approval

Extraction systems, mobile

Series PROFI MASTER

- > Robust quality with powerful filters for regular use in the repair shop or maintenance area, 400 volt
- > Rotating & swivelling extraction bonnet 360°
- > Two-stage filter (filter area 17 m²)
- > Extraction capacity with arm 1,100 m³/h
- > Noise level: 70 db(A)
- > Optional on request automatic start-stop available

Arm length 3 m
W3/IFA tested
elmag.eu/58603

Arm length 3 m
H13 AT Edition
elmag.eu/58653

INSTEAD OF PRICE EXCL. VAT
~~2,889.-~~

2,745.-

INSTEAD OF PRICE EXCL. VAT
~~2,889.-~~

2,669.-

Product video:



FREE NOW!

10 pre-filter mats

LIGHTLY USED

Arm length 3 m
H13 AT Edition
elmag.eu/V-00852

INSTEAD OF PRICE EXCL. VAT
~~2,889.-~~

DISCOUNT -29%

1,999.-






INSTEAD OF PRICE EXCL. VAT
~~1,405.-~~ **DISCOUNT -10%**
1,265.-

Induction heater iDUCTOR W2300 | elmag.eu/59240

- > Output power: 2.3 kW, Mains connection: 230 volt
- > Lightning-fast heating without an open flame
- > Loosening stuck bolts, nuts, tie rods,...
- > Incl. induction coils Ø 23 mm/M10/L=150 mm & Ø 18 mm/M8/L=150 mm and flexible induction cable L=2 m
- > Optional induction spirals available in various sizes Ø 18-52 mm (M8-M30), lengths and designs, e.g. for heating tie rods, as a pad for heating surfaces, e.g. for heating the centre of a vehicle. stickers, decorative mouldings, adhesive or paint residues,... or as a flexible cable L=1.5-3.5 m to be laid individually around the workpiece to be heated

DISCOUNT -10%

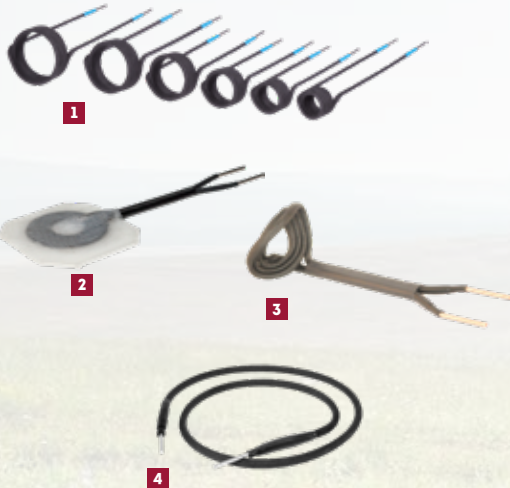

Accessories	Order number	Instead of RRP excl. VAT	RRP excl. VAT
1 Induction coil set, 6 pieces, for iDuctor W2300, max. 325 °C	59243	-277.00	249.00
2 Flat induction coil, IPAD 1010, max. 150 °C	59252	-160.00	144.00
3 Induction coil for tie rods, ST70-200, max. 150 °C	59253	-115.00	104.00
4 Induction cable straight L = 1,500 mm, max. 325 °C	59255	-50.00	45.00
Induction cable straight L = 2,000 mm, max. 325 °C	59256	-61.50	55.50
Induction cable flexible L = 1,100 mm, max. 650 °C	59257	-88.00	79.00
Induction cable flexible L = 2,000 mm, max. 650 °C	59258	-162.00	146.00
Induction cable flexible L = 2,500 mm, max. 650 °C	59259	-201.00	181.00
Induction cable flexible L = 3,000 mm, max. 650 °C	59260	-257.00	231.50
Induction cable flexible L = 3,500 mm, max. 650 °C	59261	-302.00	273.00

Induction heater, water-cooled iT 3.5K230 KB | elmag.eu/58231



- > Output power: 3.5 kW
- > For heating and loosening stuck and rusted parts: Chassis parts, exhaust systems, brake lines, body parts, drive shafts, lambda probes, axle parts
- > Quick loosening of wheel nuts and bolts
- > 5 selectable heating levels, 230 volt, 16 A fuse protection
- > 3 m hose package, 2 m supply cable
- > Weight 16 kg

INSTEAD OF PRICE EXCL. VAT
~~2,740.-~~

2,599.-

Induction heater, water-cooled iT 5K400 KB | elmag.eu/58222



- > Output power: 5 kW
- > Possible uses like iT 3.5K230 KB
- > 5 selectable heating levels, 400 volt, 16 A fuse protection
- > 3 m hose package, 8 m supply cable
- > Weight 66 kg

FREE NOW!
Induction heating head
for frontal heating



INSTEAD OF PRICE EXCL. VAT
~~5,456.-~~

DISCOUNT -10%
4,899.-

Induction heater, water-cooled

HDi 11K400 KB | elmag.eu/58223

- > Output power: 11 kW
- > For removing broken bolts, shock absorbers,...
- > For straightening shafts, tie rods, leaf springs,...
- > For loosening stuck axles, ball joints,...
- > For bending and forming sheet metal,...
- > 5 selectable heating levels, 400 volt, 16 A fuse protection
- > 4.25 m hose package, 8 m supply cable
- > Weight 120 kg



FREE NOW!

Induction heating head for frontal heating



INSTEAD OF PRICE EXCL. VAT ~~8,787.-~~ **DISCOUNT -10%**
7,839.-

Induction heater, water-cooled

HDi 16K400 KB | elmag.eu/58224

- > Output power: 16 kW
- > Possible uses like HDi 11k400 KB
- > 5 selectable heating levels, 400 volt, 32 A fuse protection
- > 4.25 m hose package, 8 m supply cable
- > Weight 130 kg



FREE NOW!

Induction heating head for frontal heating



INSTEAD OF PRICE EXCL. VAT ~~10,917.-~~ **DISCOUNT -10%**
9,829.-

Induction heater, water-cooled

HDi 18K400 TC | elmag.eu/58228

- > Output power: 18 kW
- > Can be used in the same way as the HDi 11K400 KB, but can also be extended for temperature-controlled heating of parts using an optional therosensor.
- > Incl. 7" touch screen with timer function, temperature display of the cooling liquid, electronics and transformer (°C/F)
- > 5 selectable heating levels, 400 volt, 32 A fuse protection
- > 4.25 m hose package, 8 m supply cable
- > Weight 130 kg



FREE NOW!

Induction heating head for frontal heating



INSTEAD OF PRICE EXCL. VAT ~~11,767.-~~ **DISCOUNT -10%**
10,590.-

Induction heater, water-cooled

HDi 21K400 TC | elmag.eu/58229

- > Output power: 21 kW
- > Possible uses like HDi 18K400 TC
- > Incl. 7" touch screen with timer function, temperature display of the cooling liquid, electronics and transformer (°C/F)
- > 5 selectable heating levels, 400 volt, 32 A fuse protection
- > 4.25 m hose package, 8 m supply cable
- > Weight 140 kg



FREE NOW!

Induction heating head for frontal heating



INSTEAD OF PRICE EXCL. VAT ~~14,042.-~~ **DISCOUNT -10%**
12,639.-

**V-belt drilling machine SETS
Series KBM**

DISCOUNT UP TO
-16%

- > Solid drilling table with integrated clamping plate, T-slot and integrated coolant channel
- > Drive via quality V-belt, drilling spindle with precision bearing
- > Ground steel column with toothed rack
- > Safety switch with emergency stop button and zero-voltage release

Extensive standard equipment: Quick-action drill chuck, LED lighting, R/L barrel (for models 16-32), Cone mandrel, drive-out wedge, tool set

Now included in the SET!

Machine vice, 2 clamping screws and HSS twist drill cassette, 1-13 mm for KBM 13/16 and 14.5-30 mm for KBM 25/32



KBM 13 TN



KBM 32 SN



Models		KBM 13 TN	KBM 16 TN	KBM 16 SN	KBM 25 TN	KBM 25 SN	KBM 32 SN
Technical data							
Drilling capacity in steel	mm	13	16	25	16	25	32
Spindle holder	MK	MK 2	MK 2	MK 3	MK 2	MK 3	MK 4
Speed range	rpm	500-2,500	100-2,000	100-2,000	100-2,000	100-2,000	80-1,700
Speed steps	-	5	12	16	12	16	12
Quill stroke	mm	60	80	80	80	80	120
Spindle projection	mm	127	195	195	195	213	260
Drilling table surface	mm	197 x 197	300 x 310	355 x 355	300 x 310	355 x 355	475 x 425
Mains connection	V/Hz	230 / 50-60	400 / 50-60	400 / 50-60	400 / 50-60	400 / 50-60	400 / 50-60
Weight	kg	30	56	72	64	81	130
Order data							
Order number		16030	16031	16032	16035	16033	16034
Instead of RRP excl. VAT		510.00	760.00	815.00	975.00	1,030.00	1,320.00
RRP excl. VAT		430.00	650.00	699.00	822.00	870.00	1,130.00

V-belt drill set

KBM 25 S Vario | elmag.eu/16037

- > Digital speed display
- > Control lever for speed adjustment
- > Speed adjustment by means of variator disc
- > Telescopic chuck protection CE

DISCOUNT
-16%

Now included in the SET!

Machine vice, 2 clamping screws and HSS twist drill cassette



KBM 25 S Vario

Model	25 S Vario	
Order data		
Drilling capacity in steel	mm	25
Spindle holder	MK	MK3
Speed range	rpm	440-2,200
Speed steps	-	stepless
Quill stroke	mm	150
Column diameter	mm	80
T-groove width	mm	14
Weight	kg	95
Spindle projection	mm	215
Quill distance table	mm	365
Engine power	W	1,500
Mains connection	V/Hz	400 / 50-60
Order data		
Order number		16037
Instead of RRP excl. VAT		1,280.00
RRP excl. VAT		1,075.00

Geared pillar drills

GBM 3/25 & 3/30 – Sets

- > Automatic quill feed (with GBM 3/30 SNA)
- > Digital depth display
- > Machined base plate
- > Two-stage engine
- > High-speed, up to 3,010 rpm
- > 4 feed stages (with GBM 3/30 SNA)
- > Feed rates 0.1 / 0.15 / 0.22 / 0.3 mm/rev
- > Quill holder MK3
- > 400 volt voltage



Now included in the SET!

**Cutting oil spray 350 ml,
Machine vice,
2 clamping screws and
HSS twist drill cassette**



GBM 3/25 TNE



GBM 3/30 SNA

DISCOUNT UP TO
-20%

Models	Drilling capacity steel	Speed levels / range	Quill stroke	Quill distance to table	Projection	Engine power	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	max. mm	Number / rpm	max. mm	max. mm	mm	W	kg			
GBM 3/25 TNE	25	8 / 105-2,900	120	0-580	255	900/650	130	82002	3,195.00	2,570.00
GBM 3/25 SNE	25	8 / 105-2,900	120	0-840	255	900/650	180	82005	3,485.00	2,940.00
GBM 3/30 SNA	30	8 / 75-3,010	150	50-820	320	900/1,200	210	82007	4,890.00	3,999.00

Geared pillar drill

GBM 4/35 SGA – Set | elmag.eu/82013

- > Drilling capacity 35 mm
- > Electromagnetic quill feed (0.1 / 0.15 / 0.22 / 0.33 mm/rev)
- > Quill stroke 150 mm
- > Spindle projection 320 mm
- > Automatic tool ejection
- > Smooth-running quality gearbox with heavy-duty helical gearing
- > Drill spindle with precision bearing right/left rotation
- > Tapping mode with reversible direction of rotation switchable on the operating lever



Now included in the SET!

**Machine vice,
2 clamping screws and
HSS twist drill cassette**



DISCOUNT
-18%

Model	Drilling capacity steel	Speed levels / range	Quill stroke	Quill distance to table	Engine power	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	max. mm	Number / rpm	max. mm	max. mm	W	kg			
GBM 4/35 SGA	35	8 / 75-3,010	150	100-860	1,500/1,800	310	82013	6,020.00	4,940.00




Fig. shows machine incl. optional base frame (item no. 81038)

Thread cutting arms Series EGM

DISCOUNT UP TO
-21%

- > The swivelling cutting arms with a large radius allow the tap to be easy positioning of the tap on the workpiece
- > Thread cutting at any desired angle from 0° to 90°
- > Suitable for materials such as steel, stainless steel and aluminium
- > Highest accuracy, very time-saving drilling system
- > Operation via touch display
- > Digital torque monitoring and thread depth adjustment
- > Includes quick-release chuck with integrated slip clutch
- > Underframe optionally available (item no. 81038)

Product video:



Optional accessories	Order number	Instead of RRP excl. VAT	RRP excl. VAT
Mobile base frame	81038	560.00	460.00
MH 300 magnetic holder for EGM 316	81041	430.00	360.00
MH 600 magnetic holder for EGM 336	81042	515.00	430.00

Models	Threaded bores	Working radius	Angle	Speed range	Voltage	Engine power	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
		mm	°	rpm	volt	W	kg			
EGM 316	M3-M16	1,100	0-90	0-312	230	600	25	81037	1,440.00	1,140.00
EGM 336	M6-M36	1,100	0-90	0-150	230	1,200	45	81039	1,790.00	1,575.00



Gearbox milling and drilling machine MFB 40 TGV

DISCOUNT
-19%

- > High-quality, high-tech machine for all applications
- > High-performance gearbox running in an oil bath
- > Precision microfeed
- > Integrated thread cutting device
- > Milling spindle with precision bearing and pull-in spindle for high safety
- > Smooth-running cross table with T-slots and coolant channel
- > X-axis cross table with infinitely adjustable feed and rapid traverse
- > Integrated coolant system with return flow, tank in the machine base



Model	MFB 40 TGV	
Technical data		
Drilling capacity in steel	mm	40
Milling performance face/shank	mm	76/32
Quill stroke	mm	120
Milling table surface	mm	730 x 210
T-groove width	mm	14
Speed range	rpm	6/75-1,600
Table distance X x Y	mm	500 x 210
Spindle projection	mm	210
Quill distance table	mm	25-450
Mains connection	V/Hz	400 / 50-60
Weight	kg	315
Order data		
Order number	82153	
Instead of RRP excl. VAT	3,090.00	
RRP excl. VAT	2,750.00	

Universal lathe

PROFI 1000/180 N | elmag.eu/88153

- > "CE" compliant machines with maximum safety and machine accuracy according to DIN
- > With digital position indicator
- > Durable main gearbox with gears running in an oil bath
- > Spindle bore 38 mm for extra-long shafts
- > Spindle holder CAMLOCK D1-4 DIN 55029, spindle taper MK 5



DISCOUNT
-22%



Model	PROFI 1000/180 N
Technical data	
Centre width / Centre height	1,000 / 180 mm
Turning diameter over bed / slide	360 / 224 mm
Spindle bore	51 mm
Spindle speeds Number / range	8/70 – 2,000 rpm
Engine power, 400 volt	1.5 kW
Weight	520 kg
Order data	
Order number	88153
Instead of RRP excl. VAT	10,380.00
RRP excl. VAT	8,125.00

FOR FREE! RÖHM lathe chuck and quick-change steel holder set



RÖHM



Universal lathes


Series INDUSTRY

- > "CE" compliant machines with maximum safety and machine accuracy according to DIN
- > Powerful and robust for trade & industry
- > Coolant tank and pump integrated in the machine base
- > Incl. digital 3-axis position indicator "SINO"
- > **Delivery time on request at elmag.eu/order-number**



DISCOUNT
-17%

Models	INDUSTRIE 1000/230 HD	INDUSTRIE 1500/230 HD	INDUSTRIE 2000/230 HD
Technical data			
Centre width / Centre height	1,000 / 230 mm	1,500 / 230 mm	2,000 / 230 mm
Turning diameter over bed / slide	460 / 290 mm	460 / 290 mm	460 / 290 mm
Spindle bore	80 mm	80 mm	80 mm
Spindle speeds Number / range	12 / 25–1,800 rpm	12 / 25–1,800 rpm	12 / 25–1,800 rpm
Engine power, 400 volt	5.5 kW	5.5 kW	5.5 kW
Weight	2,635 kg	2,835 kg	3,055 kg
Order data			
Order number	88173	88174	88175
Instead of RRP excl. VAT	28,760.00	32,500.00	35,800.00
RRP excl. VAT	23,625.00	26,690.00	29,360.00

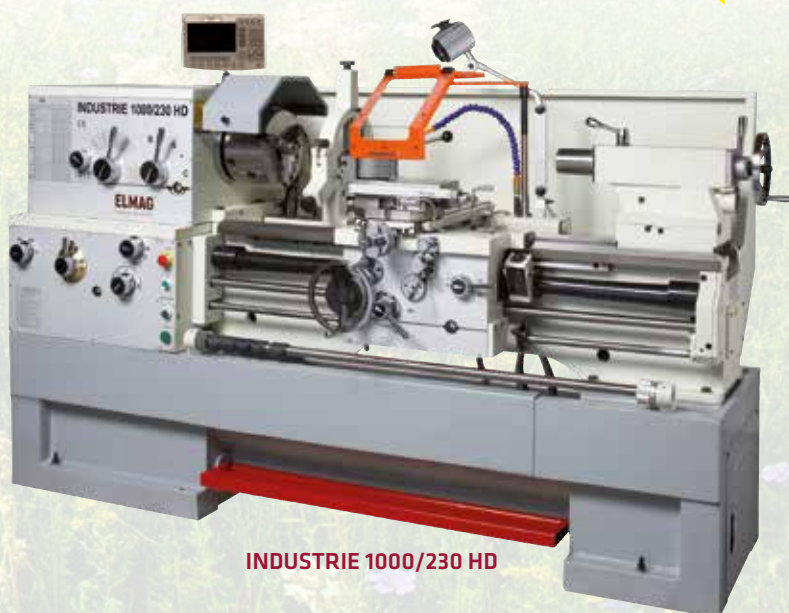

INDUSTRIE 1000/230 HD

FOR FREE! RÖHM lathe chuck and quick-change steel holder set



RÖHM



Swivel bending machine

SBM 1270 × 2.0 mm HSS 2.0 | elmag.eu/81108

Modern bending technology – optimised handling

- > Working or bending length max. 1,270 mm
- > Sheet thickness up to 2 mm
- > Large bending angle 0-135°
- > Bending beam segments made of high-alloy, ground special steel
- > Upper and bending beam segments can be removed and moved, lower beam monobloc
- > Segment widths 25/30/35/40/45/50/75/100/150/200/(250)/270 mm
- > Opening width between upper and lower cheek max. 48 mm
- > Precise upper and bending beam adjustment for rapid adaptation to different material thicknesses
- > Eccentric technology for effortless bending beam actuation
- > Powerful cylinder for energy-saving work
- > Robust, very durable construction



DISCOUNT
-25%


Model	Sheet thickness max.	Working length max.	Upper cheek segments	Bending jaw segments	Lower cheek segments	Opening max.	Bending angle	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	mm	mm									
SBM 1270 × 2.0 mm HSS 2.0	2.0	1,270	12	12	1	48	0-135	335	81108	-2,650.00	1,999.00



Electro-hydraulic workshop presses Series WPMEH

DISCOUNT
-10%

- > Electro-hydraulic drive, two drive speeds
- > Hydraulic cylinder laterally adjustable
- > Switching valve for permanent operating speed
- > Press table with locking bolt and press table chain for convenient height adjustment
- > Additional manual hand pump
- > Incl. overload safety valve and pressure gauge
- > Chrome-plated cylinder piston

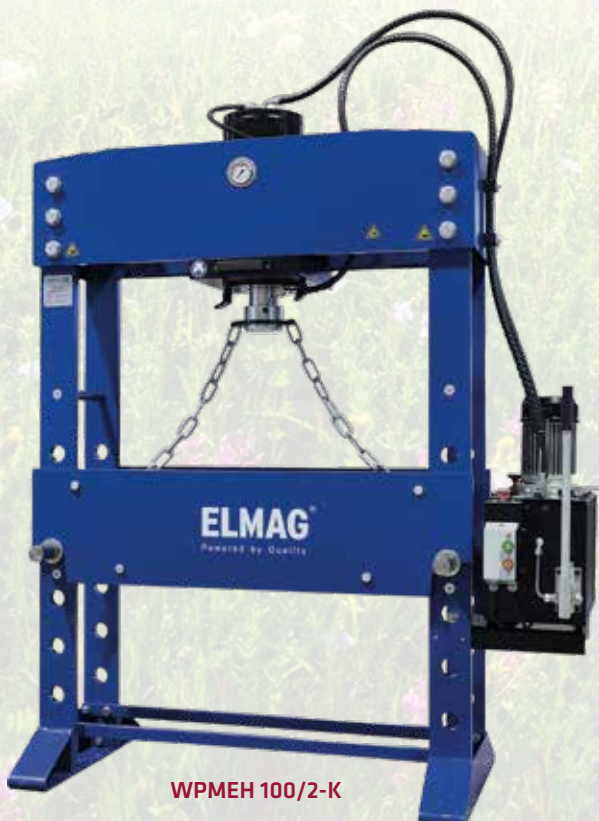

WPMEH 100/2-K

Models	WPMEH 60/2-K	WPMEH 100/2-K	WPMEH 160/2-K
Technical data			
Pressing capacity max.	t	60	100
Oil flow rate level 1/2	l/min	2.82/11.84	5.64/17.2
Piston speed level 1/2	mm/s	8.69/2.07	7.54/2.47
Return speed	mm/s	10.79	9.06
Engine power	kW	1.5	2.2
Mains connection	V/Hz	400 / 50-60	400 / 50-60
Weight	kg	540	970
Order data			
Order number	81811	81816	81817
Instead of RRP excl. VAT	8,160.00	10,195.00	14,630.00
RRP excl. VAT	7,350.00	9,180.00	13,190.00

Band saw machine

EasyCut 275.230 DG | elmag.eu/78900

- > The EasyCut series is a universal gravity band saw with a robust cast iron saw frame and saw blade with a height of 27 mm
- > Precise guidance of the saw band thanks to carbide guides
- > The saw frame is mounted with preloaded tapered roller bearings
- > Synchronised brushes for chip removal
- > The feed speed of the saw frame is continuously controlled by a hydraulic cylinder with overflow valve



DISCOUNT -10%



	○	▭	▭	▭
0°	230	275 × 180	250 × 230	230
45°R	190	190 × 150	170 × 230	180
60°R	120	120 × 100	120 × 100	100
45°L	170	185 × 100	90 × 230	150

INSTEAD OF PRICE EXCL. VAT

~~5,150.-~~

4,630.-

Model	Operating mode	Mitre range	Saw band speed	Saw band dimensions	Remaining piece length	Inlet height	Dimensions l x w x h	Drive	Weight
		°	m/min	mm	mm	mm	mm	kW / V / Hz	kg
275.230 DG	manually	-45° to 60°	40/80	2,720 × 27 × 0.9	20	978	1,588 × 1,150 × 1,477	1.1/1.5/3 × 400/50	370

Band saw machines

BOMAR Ergonomic series

- > Universal band saw machine with a robust cast iron saw frame and 27 mm band saw blade
- > The precise carbide guide of the saw blade is the prerequisite for excellent cutting performance
- > Drive 1.5 or 2.2 kW, 3 × 400 / 50 V / Hz
- > Hydraulic cutting pressure monitoring and infinitely adjustable saw blade speed on semi-automatic models

DISCOUNT UP TO -14%



DG: Double mitre 60° right / 45° left
DGH: Double mitre with semi-automatic

	320.258 DG/DGH	340.278 DG/DGH	375.308 DGH
○	0° 258	278	308
45° ▽	210	260	250
60° ▽	135	155	155
▭	0° 250	275	308
45° ▽	195	230	235
60° ▽	110	115	105
▭	0° 320 × 100	340 × 100	375 × 220
45° ▽	210 × 100	230 × 100	235 × 200
60° ▽	135 × 100	145 × 100	150 × 95
▭	0° 275 × 250	340 × 275	340 × 308
45° ▽	185 × 245	230 × 255	220 × 285
60° ▽	135 × 110	145 × 115	160 × 105

Models	Operating mode	Mitre range	Saw band speed	Saw band dimensions	Remaining piece length	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
		°	m/min	mm	mm	kg			
320.258 DG	manually	-45° to 60°	20-120	2,910 × 27 × 0.9	20	390	78903	6,400.00	5,760.00
320.258 DGH	semi-automatic	-45° to 60°	20-120	2,910 × 27 × 0.9	20	390	78904	9,610.00	8,620.00
340.278 DG	manually	-45° to 60°	20-120	3,125 × 27 × 0.9	20	400	78905	7,270.00	6,550.00
340.278 DGH	semi-automatic	-45° to 60°	20-120	3,125 × 27 × 0.9	20	400	78906	10,950.00	9,390.00
375.308 DGH	semi-automatic	-45° to 60°	20-120	3,380 × 27 × 0.9	20	400	78913	11,535.00	10,750.00

**Drill sanding machines
Series DBG**

**DISCOUNT
-25%**



DBG 315 W



DBG 832 W

- > CBN sanding disc for HSS
- > Adjusting device for centre angle 95°-135°
- > Free angle and cross sanding function
- > For drill bit Ø 2-15 or 8-32 mm
- > 11 collets 3-13 mm (Mod. DBG 315 W) or 23 collets 8-30 mm (Mod. DBG 832 W)



Optionally available	Order number	RRP excl. VAT
SDC sanding disc for DBG 315 W	61006	99.00
SDC sanding disc for DBG 832 W	61016	234.00
Collet holder for collets ER 20, Ø 14-15 mm	61007	41.50
Collet holder for collets ER 40, Ø 31-32 mm	61018	83.50
Collet set ER 20, Ø 14-15 mm	61009	19.00
Collet set ER 40, Ø 31-32 mm	61019	31.00

Models	DBG 315 W	DBG 832 W
Technical data		
Sanding range drill Ø	2.1-15 mm	8-32 mm
Sanding range Centre angle	95°-135°	95°-135°
Speed	4,400 rpm	4,400 rpm
Mains connection	230 V / 50-60 Hz	230 V / 50-60 Hz
Length x Width x Height	32 x 18 x 19 cm	49 x 25 x 26 cm
Order data		
Order number	61000	61010
Instead of RRP excl. VAT	665.00	1,490.00
RRP excl. VAT	499.00	1,120.00
RRP incl. 20% VAT	598.80	1,344.00

NOW FREE on both models!
Collet holder and collet set ER 20 or ER 40



MKS 315 RLSS-N



**Metal circular saws
Series MKS RLSS-N**



**DISCOUNT UP TO
-11%**

- > Incl. coolant unit
- > For steel, iron, light metals, solid material and profiles
- > 2 speeds 40 and 80 rpm
- > Most precise burr-free cut at any cutting angle
- > **SUPER SET** incl. base, material stand, saw blade HSS and coolant concentrate dilutable 1 : 10



ACCESSORIES

Models	MKS 250 RLSS-N	MKS 300 RLSS-N	MKS 315 RLSS-N
Technical data			
Cutting range 90°	70 / 70 x 70 / 55 x 95	80 / 80 x 80 / 100 x 70	90 / 80 x 80 / 115 x 70
Cutting range 45°	65 / 55 x 55 / 50 x 60	80 / 70 x 70 / 80 x 70	80 / 70 x 70 / 70 x 70
Clamping width vice	100 mm	105 mm	120 mm
Saw blade diameter	250 mm	300 mm	315 mm
Electric engine	0.95 and 1.32 kW / 400 V	1.1 and 1.5 kW / 400 V	1.5 and 2.2 kW / 400 V
Order data			
Order number	78020	78021	78022
Instead of RRP excl. VAT	2,525.00	2,770.00	3,630.00
RRP excl. VAT	2,250.00	2,460.00	3,250.00
RRP incl. 20% VAT	2,700.00	2,952.00	3,900.00

Combination sanding machine

KSM 150/686 | elmag.eu/61090

- > Combination sanding machine for versatile use.
- > Shaping – Regrinding – Sharpening

Model	KSM 150/686	
Sanding disc Ø / width / bore	mm	150 / 20 / 12.7
Sanding speed	m/s	23.4
Sanding belt speed	m/s	15.4
Sanding belt width / length	mm	50 / 686
Surface sanding area	mm	285 × 50
Speed	rpm	2,980
Drive engine power	W	250
Mains voltage / frequency	V/Hz	230 / 50-60
Weight	kg	7
Order number	61090	
Instead of RRP excl. VAT	81.50	
RRP excl. VAT	65.00	
RRP incl. 20% VAT	78.00	



DISCOUNT
-20%

Wet-dry sanding block

NTS 150/200 | elmag.eu/61035

The NTS 150/200 wet/dry sanding block is versatile for wet and dry sanding work, ideal for hobbyists and DIY enthusiasts. The robust metal construction and the large stainless steel water tank ensure a long service life for the sanding machine.

Model	NTS 150/200	
Sanding disc left Ø / width	mm	200/40
Sanding disc right Ø / width	mm	150/20
Sanding disc bore	mm	32
Sanding speed	m/s	23
Speed	rpm	2,980
Drive engine power	W	250
Mains voltage / frequency	V/Hz	230 / 50-60
Weight	kg	8.2
Order number	61035	
Instead of RRP excl. VAT	87.00	
RRP excl. VAT	69.00	
RRP incl. 20% VAT	82.80	



DISCOUNT
-21%

Double sanding machine

DSM 200/150 WTN | elmag.eu/61056

Wet/dry sanding machine for the precise sharpening and shaping of drilling, turning, lathe and cutting tools.

- > Quiet, vibration-free concentricity
- > Slow-running wet sanding disc Ø 200 × 40 mm, grit size 80

Model	DSM 200/150 WTN	
Sanding disc left Ø / width	mm	200/40
Sanding disc right Ø / width	mm	150/25
Sanding disc bore	mm	32
Sanding speed	m/s	23
Speed	rpm	2,950
Drive engine power	W	520
Mains voltage / frequency	V/Hz	230 / 50-60
Weight	kg	17.5
Order number	61056	
Instead of RRP excl. VAT	270.00	
RRP excl. VAT	170.00	
RRP incl. 20% VAT	204.00	



DISCOUNT
-37%



Stone cutting machines

SUPREME 120S - SET | elmag.eu/61122

SUPREME 150S - SET | elmag.eu/61123

Precision bridge saw for professional use. Construction site machine for granite and marble slabs, bricks, natural stone, concrete blocks, ceramics, tiles and porcelain stoneware.

- > Incl. Universal-DiaProfi UNI - diamond disc Ø 300 mm
- > Extensive range of accessories available on request
Additional table, mounting clamps, front handle, Handle by the engine (for immersion), Longitudinal stop, engine 2.2 kW (400 volt)
- > Incl. wheel set and laser cutting display

Models	Cutting performance		Diamond cutting disc		Electric engine			Order Number	Instead of RRP excl. VAT	RRP excl. VAT
	Tiefe	Länge			Rated performance	Voltage/frequency	Wt.			
	mm	mm	mm	mm	kW	V/Hz	kg			
SUPREME 120 S-SET	85	1,200	300	25.4	2.2	230/50	86	61122	-2,545.00	2,340.00
SUPREME 150 S-SET	85	1,500	300	25.4	2.2	230/50	92	61123	-2,690.00	2,485.00



Brick cutting machines

ZSM-L 890/700 - SET | elmag.eu/61375

ZSM-XL 890/700 - SET | elmag.eu/61376

Robust design with direct drive for the construction sector. Suitable for cutting bricks, Poroton, marble and general building site material. Cutting depth easy to adjust via quick lock.

- > Incl. wheel set, transport hook and water pump
- > High-mounted cutting table for optimum control
- > Easily manoeuvrable slide on steel rollers with precision ball bearings
- > Incl. diamond cutting disc Ø 700 mm for universal use

ZSM-XL 890/700 - SET

Models	Cutting performance		Diamond cutting disc		Electric engine			Order Number	Instead of RRP excl. VAT	RRP excl. VAT
	Tiefe	Länge			Rated performance	Voltage/frequency	Wt.			
	mm	mm	mm	mm	kW	V/Hz	kg			
ZSM-L 890/700 - SET	250	400	700	30	4	400/50	135	61375	-3,220.00	2,935.00
ZS-XL 890/700 - SET	250	520	700	30	4	400/50	140	61376	-3,535.00	3,225.00

High-frequency bottle vibrator

Series HFFR

The high-frequency bottle vibrators with integr. Frequency inverters impress with their compact design and thus form a single unit. Consisting of vibrators, protective conduit, switch housing and connection cable with Schuko plug. The very high compaction performance guarantees high reliability.



Models	Bottle Ø	Hose length	Head length	Compression performance	Frequency	Volume	Weight	Order number	RRP excl. VAT
	mm	m	mm	m³/h	Hz	dB(A)	kg		
HFFR 38/5	38	5	404	20	12,000	70	14.5	64670	995.00
HFFR 50/5	50	5	468	40	12,000	76	20	64671	995.00
HFFR 59/5	59	5	499	45	12,000	79	22.8	64672	995.00

Joint cutter

FSB-503 | elmag.eu/63083

Asphalt and concrete are uniquely cut with this machine series. The model is designed for diamond discs of Ø 350 / Ø 400 / Ø 450 / Ø 500 mm depending on the desired cutting depth

- > Heavy-duty, torsion-resistant machine frame for an optimal straight cut
- > Optimal weight distribution
- > Adjustable lines
- > Max. cutting depth 110/135/160/185 mm
- > 40-litre water tank
- > Honda GX390 engine - 10.2 HP
- > Weight: 127 kg
- > Diamond disc optionally available



INSTEAD OF PRICE EXCL. VAT
~~1,990.-~~
1,780.-
DISCOUNT -11%
RRP INCL. 20% VAT 2,136.-

Reversible vibratory plate

Series RPB

This allows large areas to be compacted with powerful machines. Vibratory plates with very high compaction performance in a wide variety of designs depending on customer requirements. On all models, the machine is protected against damage by a high-quality steel protective frame. Incl. transport hook.

- > Infinitely hydraulically adjustable forward and reverse travel
- > Self-tensioning clutch system for reduced V-belt wear
- > Crack and break-resistant base plate made of hardened steel
- > Guide rail can be locked in vertical position during transport or storage
- > New protective cage offers reliable protection for the engine and the device
- > Extra strong rubber bearings installed
- > Easy-to-mount transport wheels and rubber mat optionally available



DISCOUNT UP TO
-14%

RPB30-50

Models	Centrifugal force	Max. Speed	Surface compression	Petrol engine	Performance	Plate size	Working width	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kN	m/min	m²/h	Type	kW	mm	mm	kg			
RPB24-50	24	20	600	Honda GX 160	3.7	500 × 680	500	149	63010	2,945.00	2,535.00
RPB30-50	30	20	600	Honda GX 200	4	500 × 710	500	181	63012	3,420.00	3,065.00
RPB30-60	30	20	720	Honda GX 200	4	600 × 710	600	185	63015	3,540.00	3,180.00



Plastic repair system
HOT DOC | elmag.eu/59222

- > Wireless
- > Input: DC 5 V 2 A / Output: Max. 3.7 V 8 A
- > When fully charged, the device can attach up to 300 staples
- > Max. 600°C heating temperature
- > Battery: 3.7 V 4,000 mAh Li-ion
- > Adjustable head for angle changes
- > Overheating and overvoltage protection
- > SET consisting of: 5 V 2 A adapter, 1M Type-C USB cable, a total of 300x VA staples (0.6 mm end corrugated, 0.8 mm end corrugated 0.6 mm for outside corners, 0.8 mm for inside corners, 0.6 mm double corrugation & 0.8 mm double corrugation)



DISCOUNT
-17%
INSTEAD OF PRICE EXCL. VAT
~~239.-~~
199.-
RRP INCL. 20% VAT 238.80



Type 14120, 6 & 12 V
elmag.eu/56030
INSTEAD OF PRICE
~~76.90~~ **69.90**

Type 14225, 12 V
elmag.eu/56032
INSTEAD OF PRICE
~~136.-~~ **119.90**

Type 20300, 12 V
elmag.eu/56034
INSTEAD OF PRICE
~~163.-~~ **145.-**

Automatic battery chargers
Series MULTICHARGER

DISCOUNT UP TO
-12%

- > Automatic battery chargers for all lead-acid, MF, AGM & GEL batteries, from type 14225 also for calcium batteries (Ca/Ca)
- > Type 14120 normal charge: 6 V 1.2-14 Ah and 12 V 1.2-90 Ah, Trickle charge 1.2-120 Ah
- > Type 14225 normal charge: 12 V 14-150 Ah, trickle charge: 14-225 Ah
- > Type 20300 normal charge: 12 V 20-200 Ah, trickle charge: 20-300 Ah
- > Regeneration, summer, winter, AGM mode
- > **Trickle charge, reverse polarity, short-circuit & overvoltage protection**
- > **Multicharger type 14120 also available in a pack of 9 incl. cardboard stand!**

Automatic chargers
Series GYSFLASH

- > 5 modes: Charging (wet PB, GEL, AGM, LPF, LiFePO4 batteries), diagnostics, showroom, Battery change, power supply, advanced menu for selection of various expert modes, e.g. to create your own charging curves,...
- > CNT models also have a flash memory, USB and SMC ports for data evaluation and for connecting optional charge monitoring indicator lights, printers, barcode scanners, USB mini keyboards, ...
- > The CNT models also have a test function for voltage, engine start & alternator
- > Charging functions and charging curves can also be imported and expanded
- > Up to 4 CNT models can be operated in parallel using optional modules
- > Other models 6/12/24 V and in other power classes (Imax) available on request
- > Optionally available:
Trolley for all types of construction elmag.eu/56058 (RRP: € 425.- excl. / € 510.- incl. 20% VAT)
Wall bracket for horizontal construction elmag.eu/56056 (RRP: € 74.- excl. / € 88.80 incl. 20% VAT)
MagnetFix for vertical construction elmag.eu/56057 (RRP: € 113.- excl. / € 135.60 incl. 20% VAT)



Models	Mains connection	Rechargeable battery types		Imax	100% ED25 °C	Protection type	Cable length	Wt.	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	V	V	Ah								
GYSFLASH 100.12 HF	220-240	12	20-1,200	100	75	21	2 x 5 (16 mm ²)	8.3	56008	831.00	789.00
GYSFLASH 102.12 HF (Vertical construction)	220-240	12	20-1,200	100	75	21	2 x 5 (16 mm ²)	9.1	56007	913.00	869.00
GYSFLASH 125.12 CNT FV	220-240 / (100-127)	12	20-1,500	120 (100)	120 (100)	40	2 x 5 (25 mm ²)	10.9	56062	1,169.00	1,110.00
GYSFLASH 123.12 CNT FV (Vertical construction)	220-240 / (100-127)	12	20-1,500	120 (100)	120 (100)	20	2 x 5 (25 mm ²)	11.0	56061	1,181.00	1,125.00

Hand pallet truck Series HW 2500 & 1000


DISCOUNT UP TO
-17%

Our new ELMAG hand pallet truck guarantees safe transport of your goods!

Rubber wheels and polyurethane tandem castors ensure massive noise reduction during transport!
The robust stop block at the tip of the fork makes it easy to drive onto pallets!
3 functions of the one-hand lever: Lifting – driving – lowering!

HWN 1000

Low-floor hand pallet truck with very low drive-in height of ONLY 35 mm!
Not suitable for standard Euro pallets!

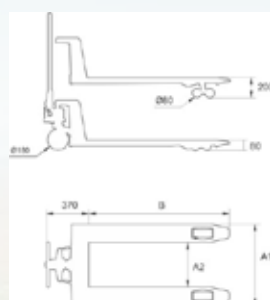

Dimensions:
A2 = 240 mm



Robust stop block at the tip of the fork



Models	Load capacity	Fork width A1	Fork length B	Minimum height	Max. lifting height	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
HW 2500	2,500 kg	540 mm	1,150 mm	80 mm	200 mm	65 kg	33300	-399.00	349.00
HWK 2500	2,500 kg	540 mm	800 mm	80 mm	200 mm	62 kg	33301	-399.00	349.00
HWL 2500	2,000 kg	540 mm	1,800 mm	80 mm	200 mm	90 kg	33302	-599.00	499.00
HWN 1000	1,000 kg	540 mm	1,150 mm	35 mm	95 mm	52 kg	33303	-849.00	749.00

Electric hand pallet truck EHW 1500 | elmag.eu/33310

Our electric hand pallet truck EHW 1500 is a true all-rounder with a load capacity of 1,500 kg. Its low weight and the fast charging time of our Li-ion batteries allow you to use it quickly and effortlessly. The EHW 1500 is perfect for use in your logistics and warehousing operations. It handles the transport of pallets, materials and goods with ease and helps to optimise your material flow. Discover the future of lightness in your company with the EHW 1500 and increase your efficiency to new heights!

- > Precise digital LCD display for the battery charge level
- > Excellent manoeuvrability thanks to lateral support rollers for optimum cornering
- > Outstanding lightness and manoeuvrability
- > Can cope with gradients of up to 4% with a load or up to 16% without a load
- > Enjoy up to 8 hours of battery life
- > Charger included for convenient recharging
- > The 24 V/20 Ah Li-ion battery weighs just 4.4 kg
- > Effortless battery change with just one movement



Model	Load capacity	Fork width	Fork length	Minimum height	Max. lifting height	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
EHW 1500	1,500 kg	540 mm	1,150 mm	80 mm	195 mm	123 kg	33310	-2,250.00	2,099.00



Electric chain hoists Series EKZ

ELMAG electric chain hoists: Efficient, powerful, safe. With high precision and resilient technology, they lift your loads effortlessly into the air.

- > Safe and reliable electromagnetic brakes with low wear and easy maintenance for fast and stable braking, without additional adjustments
- > The load disc, made from high-precision CNC-alloyed steel, ensures smooth movement of the load chain
- > Intelligent overload protection device safely diverts the force from the hoist engine in the event of an overload

DISCOUNT UP TO
-17%



Models	Capacity	Chain strands	Chain size mm	Stroke m	Speed m/min	Engine power kW	Weight kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg									
EKZ 500/2	500	1	6.3 × 19	6	7.6/2.5	0.9/0.3	54	33350	1,595.00	1,349.00
EKZ 1000/2	1,000	1	8 × 24	6	5/1.7	1.1/0.37	62	33351	1,775.00	1,499.00
EKZ 2000/2	2,000	2	8 × 24	6	2.5/0.9	1.1/0.37	62	33352	2,075.00	1,729.00
EKZ 3000/2	3,000	1	11.2 × 34	6	6/2	3.6/1.2	124	33353	2,795.00	2,349.00
EKZ 5000/2	5,000	2	11.2 × 34	6	3/1	3.6/1.2	146	33354	3,745.00	3,190.00



Electric undercarriages

Increase your efficiency in everyday work with our electric undercarriage for EKZ series electric chain hoists. Maximum precision, high performance and absolute safety – the ELMAG electric undercarriage is the ideal complement for effortless and efficient load handling. If you opt for quality, rely on our electric undercarriage for top performance.

- > Power supply and control directly via the operation of the electric chain hoist
- > Can only be used with electric chain hoists from the EKZ series
- > 2 speeds, ideal for a wide range of requirements

DISCOUNT UP TO
-20%



Models	Load capacity	Speed m/min	Engine power kW	Carrier flange width mm	Weight kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg							
Electr. undercarriage 1,000 kg for EKZ 500/2 & 1000/2	1,000	20/6.7	0.2/0.067	70-140	27.5	33355	1,155.00	925.00
Electric undercarriage 2,000 kg for EKZ 2000/2	2,000	20/6.7	0.2/0.067	70-140	28.5	33356	1,225.00	975.00
Electric undercarriage 3,000 kg for EKZ 3000/2	3,000	20/6.7	0.4/0.13	100-152	58	33357	1,425.00	1,135.00
Electric undercarriage 5,000 kg for EKZ 5000/2	5,000	20/6.7	0.4/0.13	100-152	67	33358	1,545.00	1,235.00



Electric cable winch Series ESW

Electric cable winches with 230 volt engine for safe lifting and lowering of various weight classes. Versatile use is possible in workshops, warehouses, etc. The load capacity can be doubled by attaching a double hook!

- > Lifting height 12 metres or 6 metres with double hooks
- > Safe operation via remote control
- > Up and down limiting device
- > Protection class IP 54
- > 230 volt engine with overheating protection

DISCOUNT UP TO
-23%



Models	Lifting force o. / w. pulley	Lifting speed o. / w. pulley m/min	Lifting height o. / w. pulley m	Engine power W	Weight kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg							
ESW 250	125/250	10/5	12/6	540	22	33420	149.00	119.00
ESW 600	300/600	10/5	12/6	1,200	34	33421	225.00	179.00
ESW 999	500/990	8/4	12/6	1,600	36	33422	390.00	299.00

Hand pallet truck with scales

WHW 2000 | elmag.eu/33315

The ultimate hand pallet truck for effortless weighing and transporting of loads up to 2,000 kg. Our hand pallet truck not only offers outstanding performance, but also exceptional user-friendliness.

The robust design and high-quality materials ensure a long service life, while the easy-to-read display and simple operation optimise your work processes.

- > High accuracy: Maximum deviation of 0.1%, even under unfavourable conditions
- > Summing function: Adds total weight and prevents double weighing
- > Long battery life with 4 AA batteries
- > High-contrast display: Easy to read from any angle



DISCOUNT
-19%



Model	Load capacity	Fork width	Fork length	Minimum height	Max. lifting height	Display steps	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg	mm	mm	mm	mm	kg	kg			
WHW 2000	2,000	555	1,150	85	200	1	134	33315	1,850.00	1,499.00

Scissor hand pallet truck

SHW 1000 | elmag.eu/33320

The SHW 1000 scissor lift truck is the ideal solution for a wide range of applications. Whether you need to load and unload conveyor belts, feed material into machines or simply move pallets and material containers, this manual pallet truck makes it effortless.

With its quick-lift function, safety valves and robust design, it is equipped for tasks of any size.

- > Equipped with a quick lift function that doubles the lifting speed for loads under 200 kg
- > With pressure relief valve and overload valve to prevent pump damage if the load exceeds the weight limits
- > The closed fork tips and the reinforced frame ensure a long service life



DISCOUNT
-13%



Model	Load capacity	Fork width	Fork length	Minimum height	Max. lifting height	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg	mm	mm	mm	mm	kg			
SHW 1000	1,000	520	1,140	85	800	120	33320	749.00	649.00

High pallet truck

HHW 1000 | elmag.eu/33321

Our HHW 1000 high lift pallet trucks with an impressive 1,000 kg load capacity and a generous lifting height of 1,600 mm are the ultimate solution for your lifting and transport requirements. Whether you work in warehouses, production plants or other facilities, these pallet trucks are the ideal choice. With their remarkable load capacity, you can move heavy loads with ease. The generous lifting height allows you to easily access higher shelves or storage areas.

- > Load capacity of 1,000 kg
- > Fork size of 540 x 1,150 mm Long battery life with 4 AA batteries
- > Rubber swivel castors + PU (polyurethane) tandem castors
- > Foot protection on the swivel castors
- > Foot pedal



DISCOUNT
-18%



Model	Load capacity	Fork width	Fork length	Minimum height	Max. lifting height	Weight	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	kg	mm	mm	mm	mm	kg			
HHW 1000	1,000	550	1,150	85	1,600	220	33321	1,275.00	1,049.00

Portable power station ENERGY 600 - 2400

For a mains-independent power supply and emergency power supply. Versatile application possibilities: Power tools, chargers, notebook, refrigerator. Whether for camping, at festivals, as a power source for sales stands or as a self-sufficient emergency power solution.

ELMAG power stations - Convenient provision for power outages - Operation in the home and long storage life without significant self-discharge.

Maintenance-free, super quiet, no exhaust fumes

- > Lithium iron phosphate battery (LIFEPO4) for maximum safety. Long service life and high cycle stability > 2,500 cycles
- > Intelligent battery management system with extensive protection functions against undervoltage, overvoltage, overheating, short-circuiting and overcharging
- > Extensive connection options: 230 V Schuko, 12 V DC Schuko, USB-A, USB-C, etc.
- > Digital display with detailed status monitoring, integrated solar charge controller MPPT
- > 3 charging options: Solar, 230 V and 12 V, simultaneous charging and discharging possible
- > Integrated LED lighting with SOS function


DISCOUNT UP TO
-29%



Portable power station	Continuous performance	Max. power output	Battery		Voltage form	Max. charging power	Wt. kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	230 volt 1-phase watt	Type	Capacity Wh							
ENERGY 600	600	1,000	LIFEPO4	595	pure sine	100 W	7	52901	-595.00	430.00
ENERGY 1200	1,200	3,600	LIFEPO4	992	pure sine	200 W	11	52902	-1,075.00	760.00
ENERGY 1800	1,800	4,000	LIFEPO4	1480	pure sine	400 W	15	52903	-1,475.00	1,040.00
ENERGY 2400	2,400	5,000	LIFEPO4	2232	pure sine	400 W	25	52904	-2,125.00	1,500.00

Utilise the power of the sun!

DISCOUNT UP TO
-28%

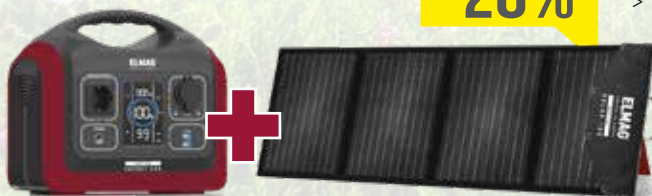

Solar generator set

- > SET includes one power station ENERGY + matching solar panel
- > Fastening points for horizontal/vertical mounting
- > Compact solar panel, with integrated support feet also for floor installation
- > SOLAR 100 = 1 panel with 100 watt, SOLAR 220 = 1 panel with 220 watt
- > SOLAR 100 DUO / SOLAR 220 DUO = 2 panels combined, more charging power

Set	Order number	Instead of RRP excl. VAT	RRP excl. VAT
ENERGY 600 + SOLAR 100	00401	-840.00	610.00
ENERGY 1200 + SOLAR 100 DUO	00402	-1,570.00	1,130.00
ENERGY 1800 + SOLAR 220	00403	-1,960.00	1,410.00
ENERGY 2400 + SOLAR 220 DUO	00404	-3,090.00	2,240.00

Solar Panel for ENERGY 600 - 2400 SOLAR 100 | SOLAR 220



SOLAR 220

Solar panel	Power watt	Order number	Instead of RRP excl. VAT	RRP excl. VAT
SOLAR 100	100	52951	-245.00	190.00
SOLAR 100 DUO	2 x 100	52952	-495.00	380.00
SOLAR 220	220	52953	-485.00	370.00
SOLAR 220 DUO	2 x 220	52954	-965.00	740.00

Inverter generator

SEBSS 2000Wi | elmag.eu/53045

- > Extra quiet, ECO automatic, parallel operation, sine wave
- > Power: max. 2.1 kVA or 1.8 kVA cont.
- > 2 230V earthed sockets, USB connection, 12 V charging connections
- > Original YAMAHA 4-stroke petrol engine – Stage V
- > Only 58-68 db(A) @ 7 m
- > Automatic switch-off in the event of low oil
- > Super light – only 22 kg

Particularly light and quiet

INSTEAD OF PRICE EXCL. VAT ~~1,295.-~~

DISCOUNT **-36%**

830.-



Inverter generator

SEBSS 3000Wi | elmag.eu/53046

- > Extra quiet, ECO automatic, parallel operation, sine wave
- > Reliable and smooth manual start
- > LCD display for power, voltage, etc.
- > Power: max. 3.0 kVA or 2.6 kVA cont.
- > 2 230V earthed sockets, USB connection, 12 V charging connections
- > Original YAMAHA 4-stroke petrol engine – Stage V
- > Only 61-71 db(A) @ 7 m
- > Automatic switch-off in the event of low oil
- > Only 41 kg, integrated chassis

Powerful and quiet

INSTEAD OF PRICE EXCL. VAT ~~1,740.-~~

DISCOUNT **-38%**

1,080.-



Petrol generator - Emergency power for your detached house

SEB 7500WD-AVR | elmag.eu/53196

INSTEAD OF PRICE ~~2,955.-~~ **-33%** **1,980.-**

SEB 7500WDE-AVR | elmag.eu/53197

INSTEAD OF PRICE ~~3,720.-~~ **-20%** **2,990.-**

High single-phase output and increased unbalanced load capacity for 230 V and 400 V consumers. Ideal for emergency power supply via AVR control.

- > Power max. 8 kVA at 400 V, 3.8 kVA at 230 V
- > Also ideal as an emergency power supply due to 3-phase electronic AVR control.
- > 50% more unbalanced load capacity than comparable devices!
- > Automatic switch-off in the event of low oil
- > Original HONDA GX390 petrol engine, air-cooled, manual start – Stage V
- > Socket: 1 × 230 V, 1 × 400 V, 72 dB(A) @ 7 m
- > SEB 7500WDE-AVR incl. electric start system and maintenance-free starter battery

Our top seller!



Petrol generator - ideal for emergency power, also for heat pumps

SEB 16000WDE-AVR | elmag.eu/53199

INSTEAD OF PRICE ~~5,570.-~~ **-26%** **4,100.-**

SEB 18000WDE-AVR | elmag.eu/53194

INSTEAD OF PRICE ~~6,440.-~~ **-15%** **5,450.-**

- > Power max. 16 or 17.5 kVA at 400 V, 5.8 kVA at 230 V
- > Also ideal as an emergency power supply due to 3-phase electronic AVR control.
- > 50% more unbalanced load capacity than comparable devices!
- > 20-litre tank, 5 or 5.6 l/h consumption (at 75% load) – Interchangeable tank system
- > Original HONDA GX 690 or HONDA iGX 800 petrol engine, air-cooled – Stage V
- > Socket: 1 × 230 V, 1 × 400 V
- > Electric start, 75 dB(A) at 7 m
- > Incl. operating hours counter, automatic idling & thermal magnetic circuit breaker
- > Incl. electric start system and maintenance-free battery

Suitable for heat pumps



SEB 16000WDE-AVR



Super favourable quality

Petrol generator

SEB 3300W | elmag.eu/53102

SEB 3300W-AVR | elmag.eu/53190

INSTEAD OF PRICE ~~1,035.-~~ **-31%** **710.-**

INSTEAD OF PRICE ~~1,335.-~~ **-27%** **970.-**

- > Power: max. 3 kVA, 2.7 kVA cont.
- > Original HONDA 4-stroke petrol engine, air-cooled – Stage V
- > Synchronous generator
- > Easy handling – manual start, 2 230V earthed sockets
- > Thermal circuit breaker with switch-off in case of overload
- > **SEB 3300W-AVR incl. electronic voltage regulation (AVR) for sensitive loads**



Favourable construction site device

Petrol generator


SEB 4100W | elmag.eu/53103

SEB 4100W-AVR | elmag.eu/53191

INSTEAD OF PRICE ~~1,470.-~~ **-32%** **1,000.-**

INSTEAD OF PRICE ~~1,775.-~~ **-27%** **1,290.-**

- > Power: max. 4 kVA or 3.6 kVA cont.
- > Original HONDA 4-stroke petrol engine, air-cooled – Stage V
- > Synchronous generator
- > Easy handling – manual start, 2 230V earthed sockets
- > Thermal circuit breaker with switch-off in case of overload
- > **SEB 4,100 W-AVR incl. electronic voltage regulation (AVR) for sensitive loads**

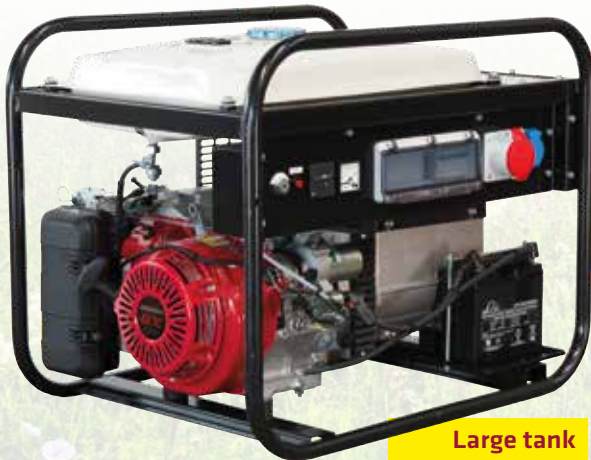

Large tank

Petrol generator – for long running times

SEBS 7500WD/25-AVR | elmag.eu/53152

SEBS 7500WDE/25-AVR | elmag.eu/53153

INSTEAD OF PRICE ~~3,690.-~~ **-12%** **3,250.-**

INSTEAD OF PRICE ~~4,375.-~~ **-16%** **3,690.-**

High single-phase output and increased unbalanced load capacity for 230 V and 400 V consumers. Ideal for emergency power supply via AVR control.

- > Power max. 8 kVA at 400 V, 3.4 kVA at 230 V
- > Large 25-litre tank for long running times
- > **Also ideal as an emergency power supply due to 3-phase electronic AVR control**
- > **50% more unbalanced load capacity than comparable devices**
- > Original HONDA GX390 petrol engine, air-cooled – Stage V
- > Manual start, 72 dB(A) @ 7 m, socket: 1 x 230 V, 1 x 400 V
- > Automatic switch-off in case of low oil, hour counter, voltmeter, TM-SS
- > SEB 7500WDE-AVR incl. electric start system and maintenance-free starter battery



Super quiet

Petrol generator – super-silenced Series SEBSS

DISCOUNT UP TO **-15%**

The super-silenced SEBSS models are technically perfect and elegant. At just 62–69 dB(A), they are among the quietest petrol-powered generators. They supply alpine huts, building sites, stages and tents, sales stands and weekend homes, come with the fire brigade as mobile emergency responders and protect important private, commercial, agricultural and municipal facilities as emergency power generators.

- > **Incl. electronic voltage regulation (AVR) for sensitive loads**
- > Original HONDA GX390 petrol engine, air-cooled, only 62–69 dB(A)
- > With control module DSE 3110 for automatic engine & generator monitoring
- > Automatic switch-off in the event of overtemperature and low oil
- > Expandable to automatic emergency power supply

Models	400 volt		230 volt			Petrol engine – 3,000 rpm – 50 Hz – air-cooled – Stage 5										Sound level dB(A) @ 7 m	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	3-phase		1-phase			Type	Performance	Feed roller	Cyl.	Tank	Cons.	Run.	Wt.						
	kVA max.	kVA cont.	A	kVA max.	kVA cont.	A	HONDA	kW	ccm	l	l/h 75%Load	h 75%Load	kg	LWA					
SEBSS 6500WDE-AVR	7	6.5	9.4	2.5	2.3	10	GX 390	8.2	389	1	20	2.4	8.3	150	87	62	53144	-7,925.00	6,750.00
SEBSS 12000WDE-AVR	12	10	14.4	4	3.7	16	GX 630	14	688	2	20	4.2	4.8	204	91	66	53147	-9,315.00	8,250.00
SEBSS 15000WDE-AVR	15	12.5	18	6	5.4	23	GX 690	15	688	2	20	5	4	224	94	69	53148	-10,770.00	9,500.00

Diesel generator - Emergency power for your detached house Series SED 7000WD(E)-AVR

DISCOUNT UP TO
-20%

The SED series appliances are frequently used 400/230 volt frame units with sufficient power for construction and agriculture. Also ideal as an emergency power supply due to AVR control and increased unbalanced load capacity.

HATZ four-stroke diesel engine already fulfils the EU Stage V emissions standard.

- > Synchronous generator with AVR control - ideal for sensitive loads
- > Thermal circuit breaker with switch-off in case of overload
- > WD: Manual start with pull-wire starter WDE: Electric start incl. battery
- > Incl. magneto-stop for electric engine switch-off and automatic switch-off at low oil pressure with e-start version



Diesel power

Also ideal as an emergency power supply due to 3-phase electronic AVR control
50% more unbalanced load capacity than comparable devices

Diesel generator - Emergency power for your detached house SED 13500WDE-AVR

DISCOUNT
-14%

The SED series appliances are frequently used 400/230 volt frame units with sufficient power for construction and agriculture. Also ideal as an emergency power supply due to AVR control and increased unbalanced load capacity. Many possible applications thanks to the interchangeable tank system, incl. multifunction display

Incl. powerful Kohler/Lomb. 25LD 425 engine.

- > Synchronous generator with AVR control - ideal for sensitive loads
- > Thermal circuit breaker with switch-off in case of overload
- > WDE: Electric start incl. battery
- > Incl. magneto-stop for electric engine switch-off and automatic switch-off at low oil pressure with e-start version



Models	400 volt			230 volt			Diesel engine - 3,000 rpm - 50 Hz - air-cooled							Sound level dB(A)@ 7 m	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	3-phase			1-phase			Type	Stage	Performance kW	Tank l	Cons. l/h 75%Load	Run. h 75%Load	Wt. kg				
	kVA max.	kVA cont.	A	kVA max.	kVA cont.	A											
SED 7000WD-AVR	7	6.5	9.4	3.8	3.4	14.4	Hatz 1B40	5	7.1	5	1.9	2.6	95	83	53210	5,150.00	4,450.00
SED 7000WDE-AVR	7	6.5	9.4	3.8	3.4	14.4	Hatz 1B40	5	7.1	5	1.9	2.6	110	83	53211	6,420.00	5,650.00
SED 13500WDE-AVR	13.5	12.7	18	5	4.6	20	Kohler/Lomb. 25LD 425	-	13	20	3	6.7	167	85	53236	7,495.00	6,490.00

Diesel generator with super sound insulation SEDSS 7000WDE-AVR

DISCOUNT
-20%

The whisper-quiet SEDSS models are often the first choice for stationary emergency power supply in private homes due to their long running time and low diesel consumption. They are suitable for installation in customer service vehicles, energy containers and mobile homes and thus form the centrepiece of mobile workshops or supply systems.

- > Original Hatz four-stroke air-cooled diesel engine
- > Practical exchangeable tank with large tank capacity
- > Easy handling - electric start system with maintenance-free starter battery
- > Magneto-stop system for automatic start-stop system
- > Automatic switch-off in the event of overtemperature and low oil pressure
- > With control module DSE 3110 for automatic engine & generator monitoring
- > and remote start/stop via potential-free contact
- > Incl. electronic voltage regulation (AVR) for sensitive loads
- > Extendable to automatic emergency power supply



Models	400 volt			230 volt			Diesel engine - 3,000 rpm - 50 Hz - air-cooled							Sound level LWA dB(A) @ 7 m	Order number	Instead of RRP excl. VAT	RRP excl. VAT			
	3-phase			1-phase			Type	Stage	Performance kW	Feed roller ccm	Cyl.	Tank l	Cons. l/h 75%Load					Run. h 75%Load	Wt. kg	
	kVA max.	kVA cont.	A	kVA max.	kVA cont.	A														
SEDSS 7000WDE-AVR	7	6.5	9.4	3.8	3.4	14.4	Hatz 1B40	5	7.1	462	1	20	1.9	10.5	200	91	66	53226	11,815.00	9,500.00

Diesel generator with super sound insulation
Series SEDSS

DISCOUNT UP TO
-10%



SEDSS 243 WDE

Low consumption and noise levels, long running times and a long service life – the water-cooled SEDSS models are among the most successful diesel aggregates. They secure the infrastructure of public buildings, commercial and agricultural enterprises, supply remote properties such as alpine farms and ski huts and accompany service teams, construction and relief teams – the "right" electricity is always with them.

- > Original Kubota four-stroke diesel engine with 3,000 rpm
- > Water cooling, large dimensioned cooling system
- > AVR control ideal for electronic loads, voltage diff. max. ±1%
- > Digital control panel DSE 4520 for man. start, automatic & remote start
- > Extensive socket outlet panel
- > RCD 30 mA for socket outlets
- > Direct power outlet for building emergency power supply – internal
- > With remote start connection for automatic start via potential-free contact
- > Lifting device as standard!
- > **NEW: Version V2 incl. trickle charger and 32 A-1h socket for building power supply on the rear of the device and matching plug**

Models	400 volt			230 volt			Diesel engine – 3,000 rpm – 50 Hz – water-cooled										Sound level	Order number	Instead of RRP excl. VAT	RRP excl. VAT	
	3-phase			1-phase			Type		Performance	Tank	Cons.		Run.		Wt.	dB(A) @ 7 m					
	kVA max.	kVA cont.	A	kVA max.	kVA cont.	A	KUBOTA	Stage	kW	l	l/h 75%Load	h 75%Load	kg	LWA	dB(A) @ 7 m						
SEDSS 113WDE	11	10	14.4	3.8	3.4	14.4	D722	5	11.3	58	2.5	23.2	345	92	67	53453	-15,190.00	13,650.00			
SEDSS 113WDE-V2	11	10	14.4	3.8	3.4	14.4	D722	5	11.3	58	2.5	23.2	345	92	67	00751	-15,595.00	14,000.00			
SEDSS 133WDE	13.5	12	17	5	4.6	20	D902	5	14	58	3.3	17.6	360	96	71	53467	-15,975.00	14,350.00			
SEDSS 133WDE-V2	13.5	12	17	5	4.6	20	D902	5	14	58	3.3	17.6	360	96	71	00752	-16,395.00	14,750.00			
SEDSS 183WDE	18	17	25	6.8	6.2	27	D1105	5	17	63	3.9	16.2	450	96	71	53459	-17,570.00	15,800.00			
SEDSS 183WDE-V2	18	17	25	6.8	6.2	27	D1105	5	17	63	3.9	16.2	450	96	71	00753	-17,990.00	16,200.00			
SEDSS 243WDE	24	23	33	8.8	8	35	V1505	-1)	27	73	5	14.6	572	96	71	53461	-20,490.00	18,450.00			
SEDSS 243WDE-V2	24	23	33	8.8	8	35	V1505	-1)	27	73	5	14.6	572	96	71	00754	-20,910.00	18,800.00			

1) Only for stationary operation

Complete emergency power packages
Series SEDSS WDE-ASS

DISCOUNT UP TO
-14%

Automatic emergency power systems protect users and operators of technical systems from the effects of a power failure. The DSE 7320 automatic start/stop module monitors the mains current on three phases, starts the generator in the event of a power failure and ensures that the connected consumers are automatically supplied with energy.

Diesel-powered emergency generators are the right choice if frequent and intensive use of the generator is to be expected. They run on low-cost diesel fuel, are particularly robust and offer a long service life.

- > Trickle charging included
- > Electric cooling water preheating as standard
- > Lifting device for forklift trucks with anchor holes as standard
- > Exhaust air and flue gas position optionally blowing out forwards or upwards, making the following versions possible: Exhaust air and exhaust gas at the front, exhaust air and exhaust gas at the top, exhaust air at the front and exhaust gas at the top, exhaust gas at the front and exhaust air at the top (can be changed subsequently) for the simplest connection for indoor installation.
- > Incl. automatic mains/emergency power switchover with electrical and mechanical interlocking

Plug & Play – simple installation!



SEDSS 243WDE-ASS

Models	400 volt			230 volt			Diesel engine – 50 Hz – water-cooled										Wt.	Sound level	DSE 7320 Switching power	Order number	Instead of RRP excl. VAT	RRP excl. VAT	
	3-phase			1-phase			Type		Performance	Feed roller	Tank	Cons.		Run.		dB(A) @ 7 m							
	kVA max.	kVA cont.	A	kVA max.	kVA cont.	A	KUBOTA	rpm	kW	ccm	l	l/h 75%Load	h 75%Load	kg	LWA	dB(A) @ 7 m							
SEDSS 113WDE-ASS	11	10	14.4	3.8	3.4	14.3	D722	3,000	11.3	719	58	2.5	23.2	345	90	65	40	00543	-19,675.00	16,990.00			
SEDSS 133WDE-ASS	13.5	12	17	5	4.6	20	D902	3,000	14	898	58	3.3	17.6	360	96	71	40	00545	-20,570.00	17,990.00			
SEDSS 183WDE-ASS	18	17	25	6.8	6.2	27	D1105	3,000	17	1,123	63	3.9	16.2	450	96	71	40	00547	-22,725.00	19,500.00			
SEDSS 243WDE-ASS	24	23	33	8.8	8	35	V1505	3,000	27	1,498	73	5	14.6	572	96	71	60	00549	-25,795.00	22,250.00			

PTO power generator – for home and field operation Series SEZN-IT/TN

- > House and field operation possible via operating mode selector switch
- > Ideal supply solution for agriculture and forestry
- > Extensive display and safety functions (traffic light display for frequency & voltage)
- > Voltage and power display for all 3 phases via multifunction display module
- > Incl. AVR control for electronic loads (e.g. milking motor, feeding systems, etc.)
- > Adjustable frequency, voltage and unbalanced load monitoring
- > Insulation monitoring 2-stage for field operation – no earth spike required
- > Sockets (field operation): 2x Schuko 230 V, 1x CEE 16 A 400 V, 1x CEE 32 A 400 V
- > 1h socket (in-house operation): 1x CEE 63 A 400 V (up to SEZN 50), 1x CEE 125 A 400 V (from SEZN 65)
- > Information and availability: elmag.eu/order-number



Display units for basic setting for easy adjustment of the correct PTO speed:

- > Analogue voltage display
- > LED display Voltage OK/Not OK
- > Analogue frequency display
- > LED traffic light display frequency high/OK/low

Control panel and socket outlet panel:

- > Multifunction display (V, A, Hz)
- > House/field mode changeover switch
- > ISO monitor two-stage with error display
- > Voltage and frequency monitoring
- > 1h socket outlet for home and field operation



SEZN 30WD-AVR-IT/TN

Emergency power for the entire yard

Models	400 volt		Tractor min PS	PTO shaft12 Speed rpm	Generator Speed rpm	Protective type	Weight kg	Order number	Instead of RRP excl. VAT	RRP excl. VAT
	3-phase kVA max.	kVA cont.								
SEZN 20WD-AVR-IT/TN	21.8	19.8	50	430	1,500	IP44	205	53780	9,100.00	6,990.00
SEZN 30WD-AVR-IT/TN	29.7	27.0	70	430	1,500	IP44	245	53781	9,600.00	7,390.00
SEZN 35WD-AVR-IT/TN	35.6	32.4	85	430	1,500	IP44	263	53782	9,875.00	7,490.00
SEZN 45WD-AVR-IT/TN	44.5	40.5	100	430	1,500	IP44	280	53783	10,170.00	7,590.00
SEZN 50WD-AVR-IT/TN	49.5	45.0	115	430	1,500	IP44	315	53784	11,170.00	8,650.00
SEZN 65WD-AVR-IT/TN	64.4	58.5	145	400	1,500	IP44	350	53785	13,185.00	10,150.00
SEZN 80WD-AVR-IT/TN	79.2	72.0	180	400	1,500	IP44	380	53786	13,740.00	10,550.00
SEZN 90WD-AVR-IT/TN	92.1	83.7	210	400	1,500	IP44	400	53787	14,185.00	10,950.00



WHO IS ELMAG?

- > Family business with 60 employees from Ried im Innkreis, Upper Austria
- > High-quality machines for compressed air, welding, metalworking, workshop technology and power generation
- > Available from specialised dealers for tools, machines and electrical engineering
- > Service: Professionally trained service team, on-site service for large machines
- > For 40 years: unique, trusting and appreciative corporate culture

QUALITY FROM AUSTRIA =

Quality: No compromises

High-quality, robust devices with well-known and tried-and-tested engines and generators that you can rely on in an emergency.

Service that convinces

We emphasise simple operation and maintenance. Our service team will provide you with fast and competent support, including on site for large machines or commissioning.

Safety and reliability

All ELMAG products fulfil the latest safety requirements. You receive a 2-year warranty, 3 years upon registration and at least 15 years spare parts supply



40 YEARS ELMAG®

Powered by Quality

Anniversary



+ Now included in the SET!

ANNIVERSARY PRICE

INSTEAD OF PRICE EXCL. VAT ~~560.-~~ **DISCOUNT -26%**
415.-

V-belt drill set

KBM 16 T Vario | elmag.eu/16036

- > Digital speed display
- > Control lever for speed adjustment
- > Infinitely variable speed adjustment by means of variator disc
- > LED work light
- > Incl. laser drill indicator

+ Now included in the SET!

Cutting oil spray 350 ml, Machine vice, 2 clamping screws and HSS twist drill cassette

Drilling capacity in steel 16 mm, spindle holder MK2, spindle projection 150 mm
Infinitely variable speed levels, range 340–2,200 rpm, quill stroke 90 mm quill distance table 360 mm, Ø column 60 mm, T-slot width 14 mm
Motor power 550 W, mains connection 230 V / 50–60 Hz, weight 42 kg

Inverter generator

SEBSS 2000Wi | elmag.eu/53045

- > Extra quiet, ECO automatic, parallel operation, sine wave
- > Power: max. 2.1 kVA or 1.8 kVA cont.
- > 2 230V earthed sockets, USB connection, 12 V charging connections
- > Original YAMAHA 4-stroke petrol engine – Stage V
- > Only 58–68 db(A) @ 7 m
- > Automatic switch-off in the event of low oil
- > Super light – only 22 kg

Particularly light and quiet

ANNIVERSARY PRICE

INSTEAD OF PRICE EXCL. VAT ~~1,295.-~~ **DISCOUNT -36%**
830.-



Stone cutting machine

STM 600/350 – SET | elmag.eu/61365

- > All-round machine for construction companies, pavers, landscapers
- > Robust design, yet perfect to handle
- > Cutting height 110 mm, cutting length max. 600 mm
- > 230-volt engine with 2.2 kW
- > Height-adjustable cutting head
- > Incl. transport wheels and incl. water pump
- > Disc cooling with dosing valve
- > Weight: 72 kg



+ With diamond disc UNI Ø 350 mm



ANNIVERSARY PRICE

INSTEAD OF PRICE EXCL. VAT ~~990.-~~ **DISCOUNT -25%**
745.-

3 YEARS WARRANTY
AT A ONLINE-REGISTRATION
www.elmag.eu/3years